




# Plank grating D

## Stainless steel

Safety gratings Type D is characterised by raised surface without holes. Type D is applied where closed surface is required and is a strong alternative to deck plating.

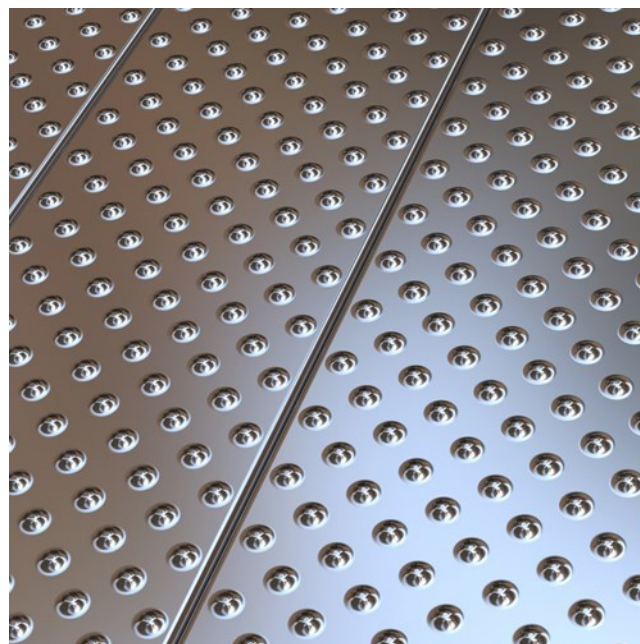

### Specifications

PTV guidelines	36+ Low Slip Potential
Dry PTV average	86
Wet PTV average	60
Free area	~0 %
Heel proof	
Closed surface	
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

### Suitable application areas

Public access

Rail gantries

Vehicular

Access Walkways & Maintenance Platforms

**Other materials available**


---

Steel

---

Aluminium 3005-16 H66

---

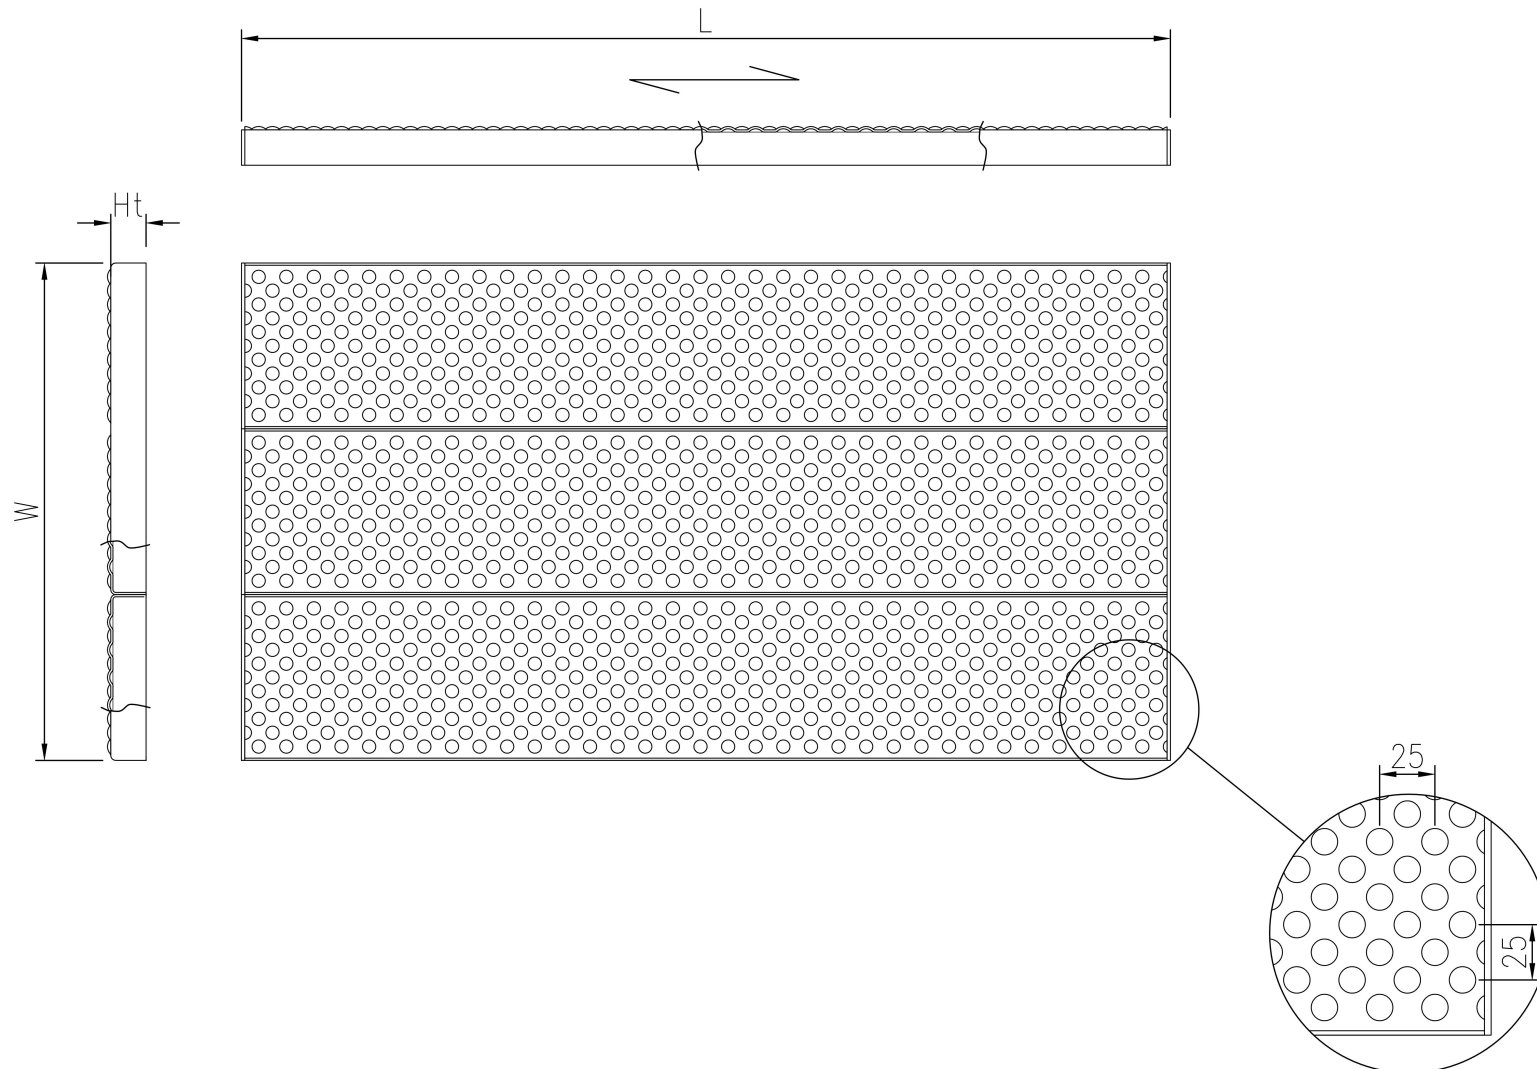

Product name  
OPTIMO Plank Grating D2