



Tread 02

Stainless steel AISI 316



Specifications


PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm

Suitable application areas

Straight staircases

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
600	150	33	2	Mill finish	On request	F120024200
600	150	33	2	Pickled	On request	F120024240
500	200	45	2	Pickled	Stock item	F120084240
600	200	45	2	Mill finish	Stock item	F120094200
600	200	45	2	Pickled	Stock item	F120094240
700	200	45	2	Mill finish	Stock item	F120104200
700	200	45	2	Pickled	Stock item	F120104240
800	200	45	2	Mill finish	Stock item	F120114200
800	200	45	2	Pickled	Stock item	F120114240

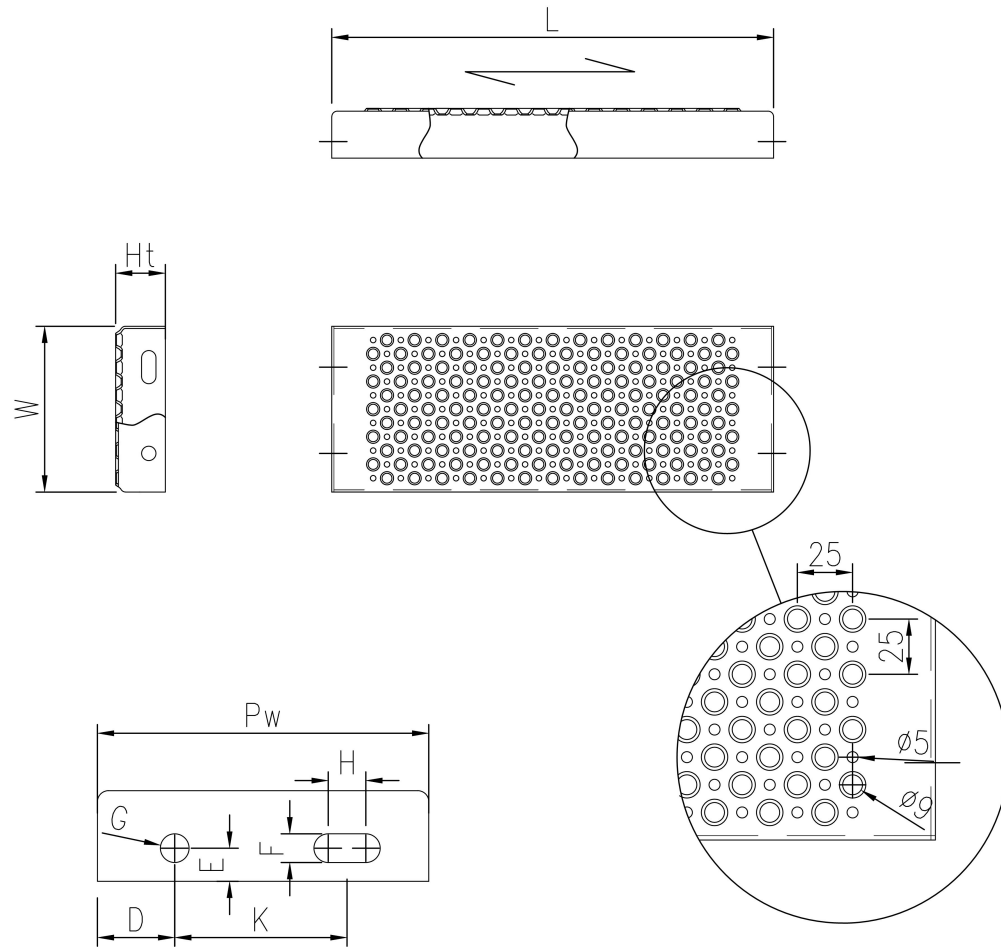

Product name
 OPTIMO Tread O2