




Plank Extr. 03

Aluminium 6060-T61

Optimo 03 Comprising of 14mm dia punched raised holes and 8.5mm dia depressed drainage holes. This punched profile provides excellent slip resistance, unsurpassed high strength to weight ratio and increased drainage owing to the larger holes giving a transparency of 28-32%.

- Manufactured in various combinations in relation to: - width, height, length and profile.
- Drainage
- High slip resistance
- Light weight.
- Bespoke sizes available
- Calculations & product data sheet / certificates available upon request.

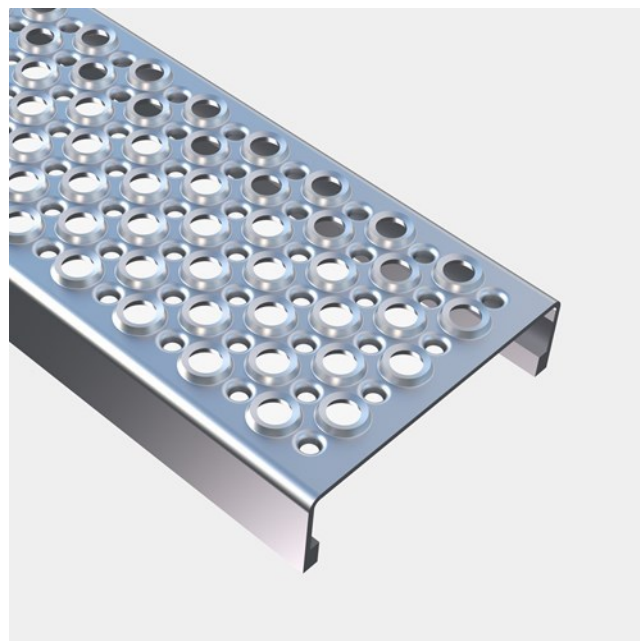

Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	73 multi-directional acc. to BS 7976
Wet PTV average	51 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14 mm
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592

Suitable application areas


Access Walkways & Maintenance Platforms

Straight staircases



Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Thickness (mm)	Finish	Availability	Item No.
6000	100	43	3	Mill Finish	Stock item	C000016200p
6000	150	43	3	Mill Finish	Stock item	C000026200p
6000	200	43	3	Mill Finish	Stock item	C000036200p

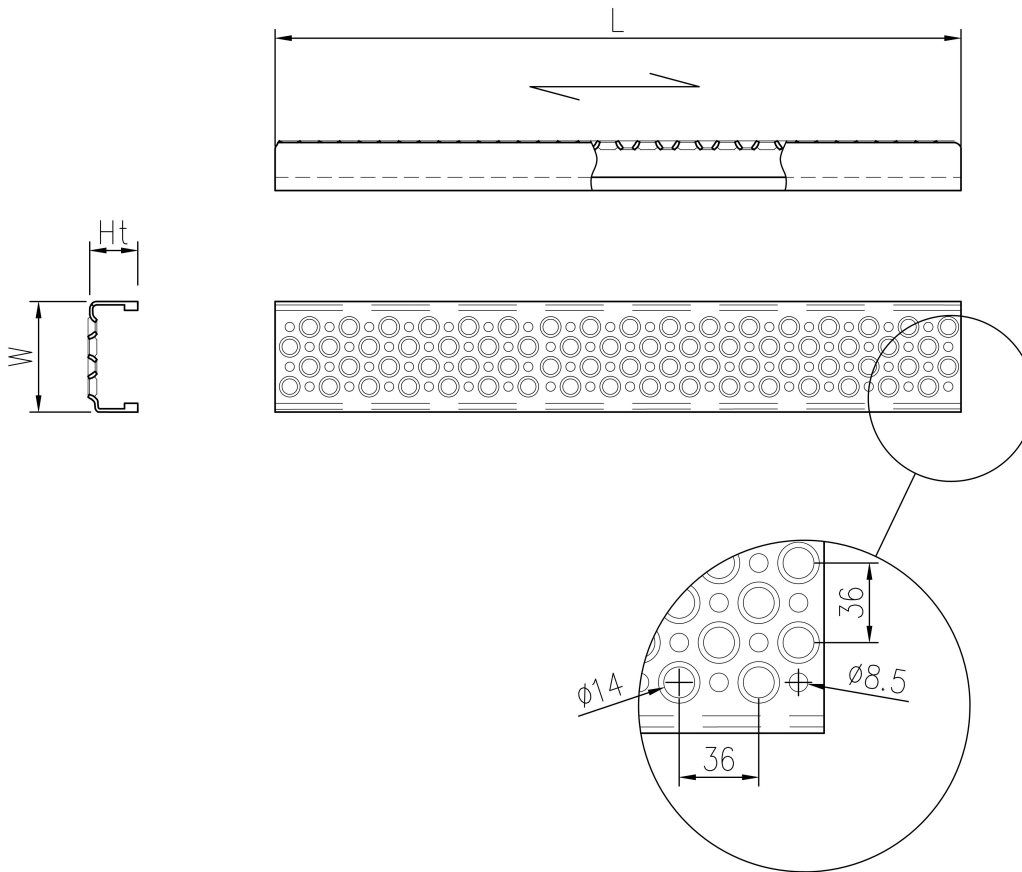

PcP

Product name
OPTIMO Plank Extr O3