



# Tread 02

## Steel 240 YP



### Specifications

PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
	550 °C

### Suitable application areas

Straight staircases

## Related products

---

Tread plank ACHIL O2

---

Plank grating O2

---

Tread ACHIL O2

---

Tread ACHIL VISUAL O2

---

Tread BUILD VISUAL O2

---

## Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
500	150	33	2	Mill finish	Stock item	F120010100

## Other materials available


---

Stainless steel AISI 304

---

Stainless steel AISI 316

---

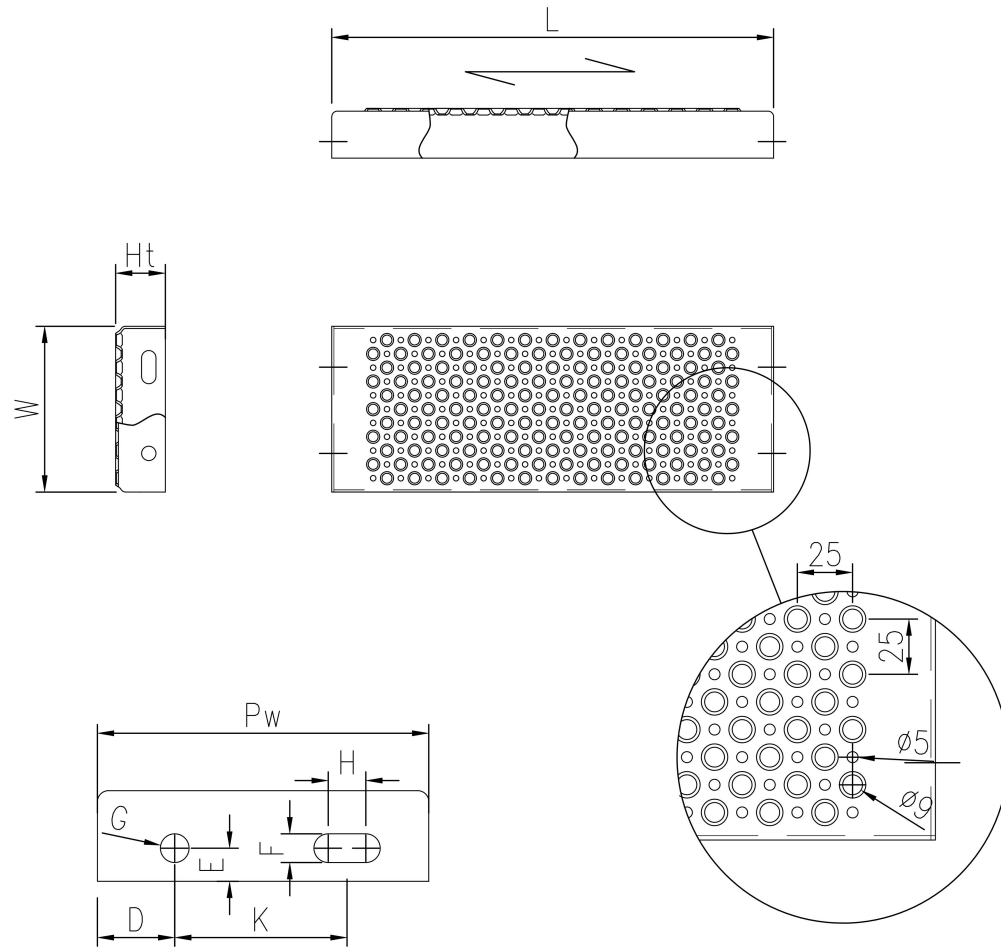

**PcP** Product name  
 OPTIMO Tread O2