




# Mesh grating 33/33

Stainless steel AISI 304

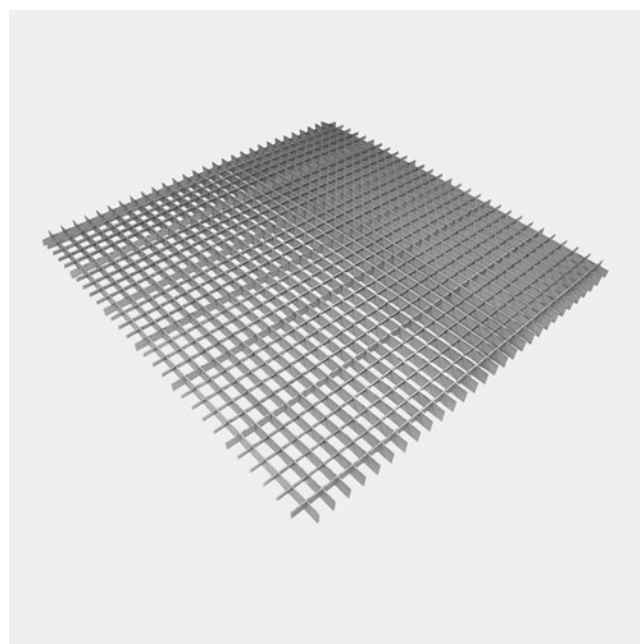

## Specifications

PTV guidelines	25-35 Moderate Slip Potential
Dry PTV average	60
Wet PTV average	25
Slip resistance	R9 = 10° > slope > 6° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	88 %
Distance between bearing bars (Ma)	33 mm
Distance between filler bars (Mc)	33 mm
Ball proof	35 mm in accordance with EN ISO 14122-2


### Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
2000	1000	25	2	Mill finish	Stock item	F202204100
1000	1000	25	2	Mill finish	Stock item	F202794100

### Other materials available

Stainless steel AISI 316

Steel 240 YP

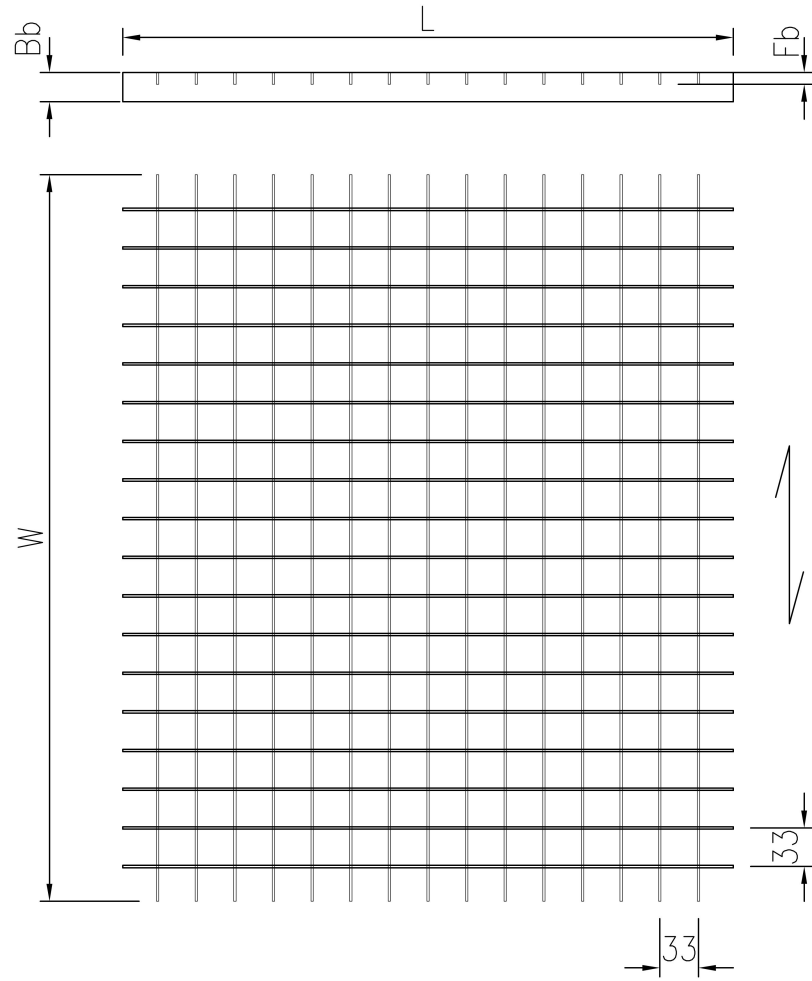

**PCP** Product name  
Mesh Grating 33/33 - No Grating