




# Plank grating O3

## Stainless steel

Safety gratings Type O3™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type O3™ are produced in different dimensions and profiles.

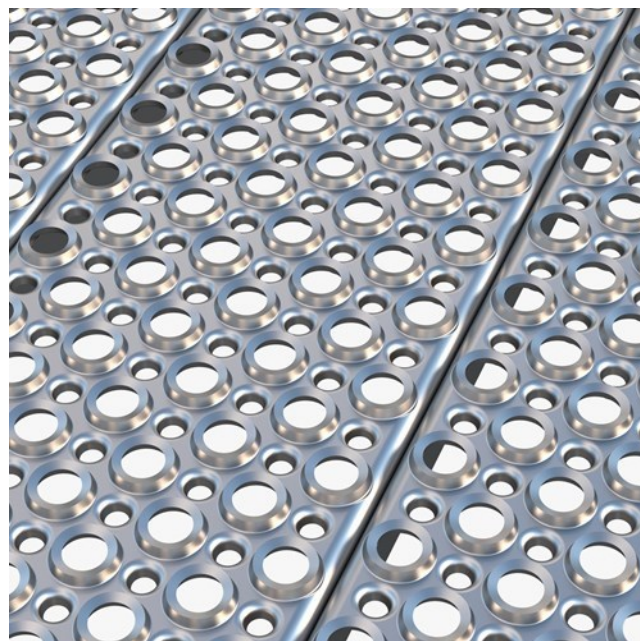

### Specifications

Displacement space	V10 acc. to DIN 51130
PTV guidelines	36+ Low Slip Potential
Dry PTV average	73
Wet PTV average	51
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

**Accessories**

---

Fixing clip, lower part 03

---

**Related products**

---

Fixing clip, lower part 03

---

**Other materials available**


---

Steel

---

Aluminium 3005-16 H66

---

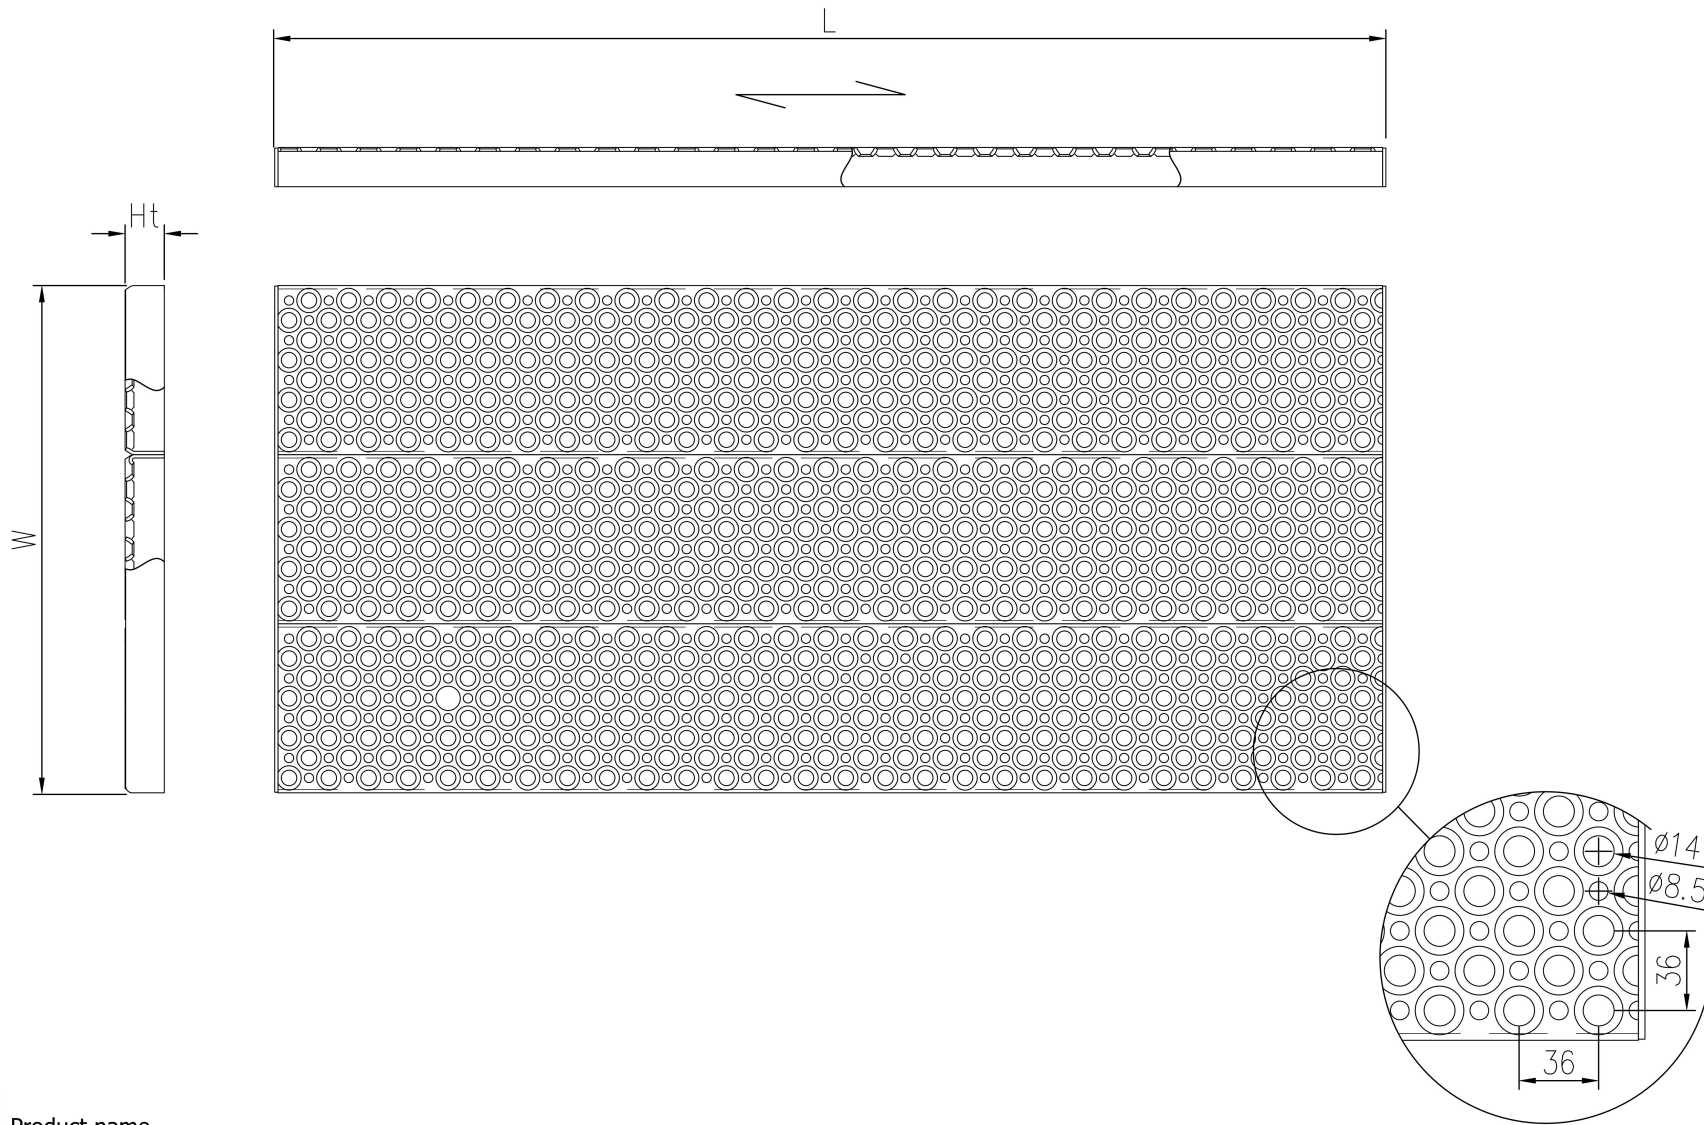

**PcP** Product name  
OPTIMO Plank grating O3