


Plank Grating 03

Stainless steel

Safety gratings Type $O3^{\text{\tiny{TM}}}$ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type $O3^{\text{\tiny{TM}}}$ are produced in different dimensions and profiles.

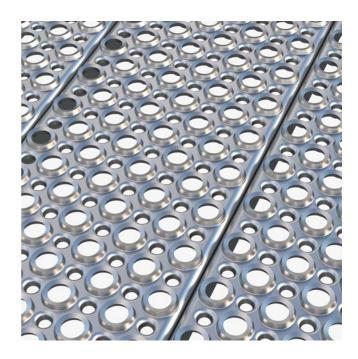

Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	73 multi-directional acc. to BS 7976
Wet PTV average	51 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14 mm
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592



Accessories		
Fixing Clip, Lower Part 03		
Related products		
Fixing Clip, Lower Part O3		
Other materials available		

Aluminium 3005-16 H66

