




Plank grating O2

Aluminium

O2 plank gratings are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type O2 are produced in different dimensions and profiles.

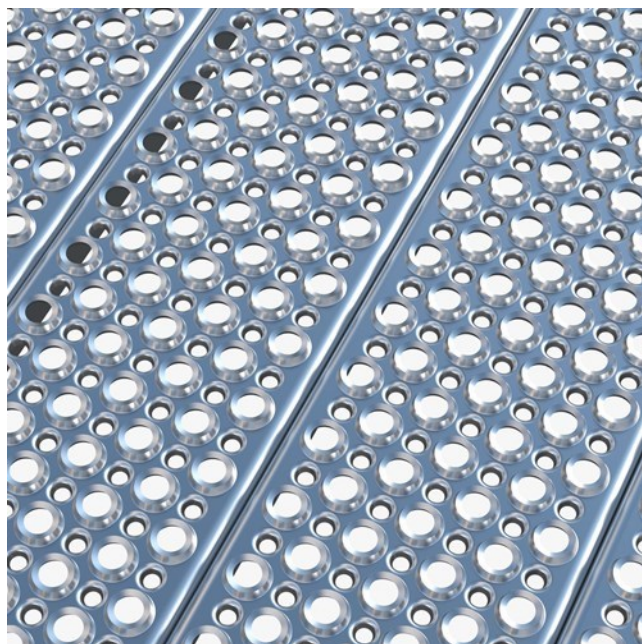

Specifications

Displacement space	V10 acc. to DIN 51130
PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

Suitable application areas

Access Walkways & Maintenance Platforms

Balconies

Accessories

Fixing clip, lower part 02

Related products



Fixing clip, lower part 02

Tread ACHIL 02

Other materials available

Steel

Stainless steel

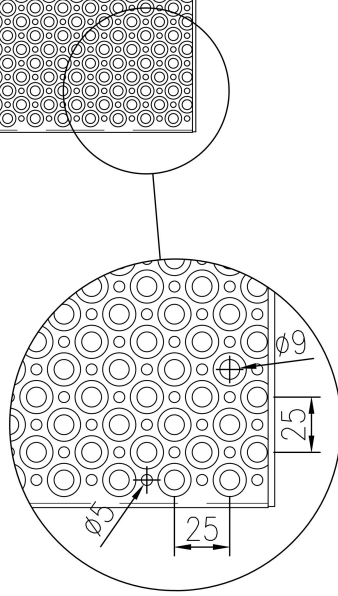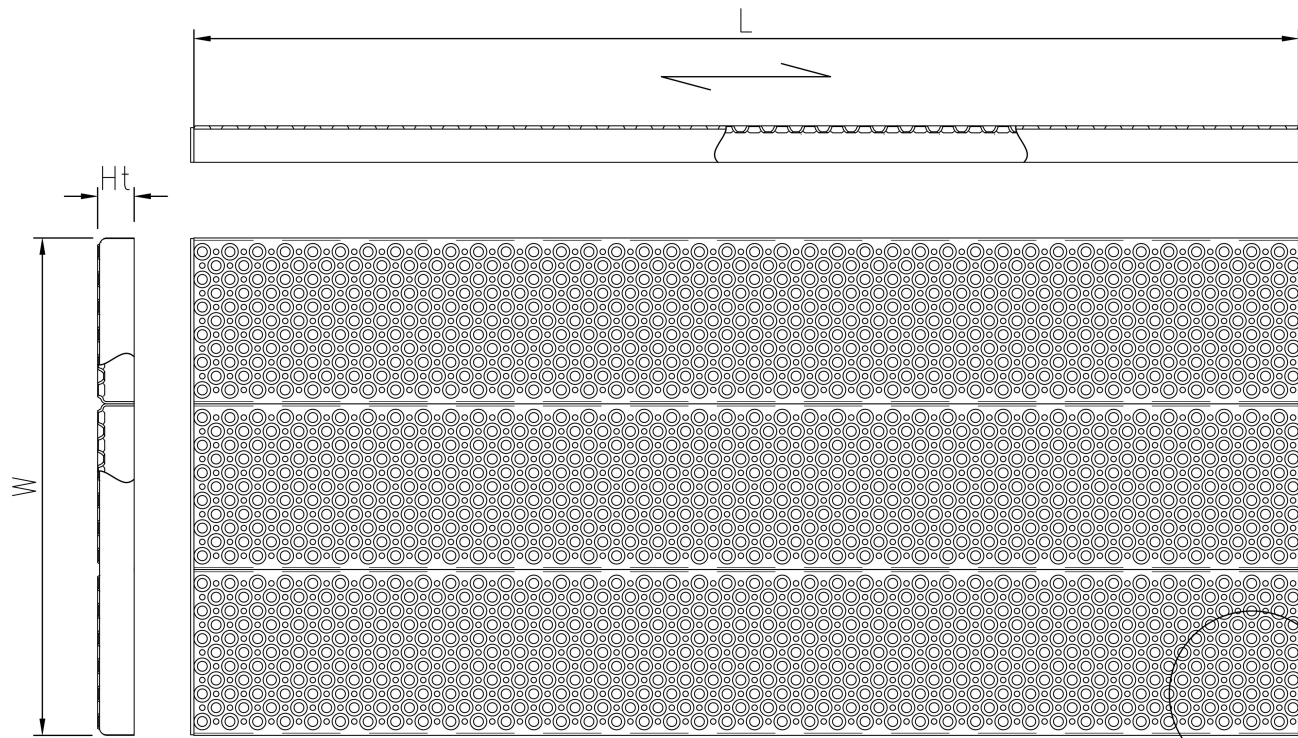

PcP Product name
OPTIMO Plank Grating O2