




Plank grating O3

Aluminium

Safety gratings Type O3™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type O3™ are produced in different dimensions and profiles.

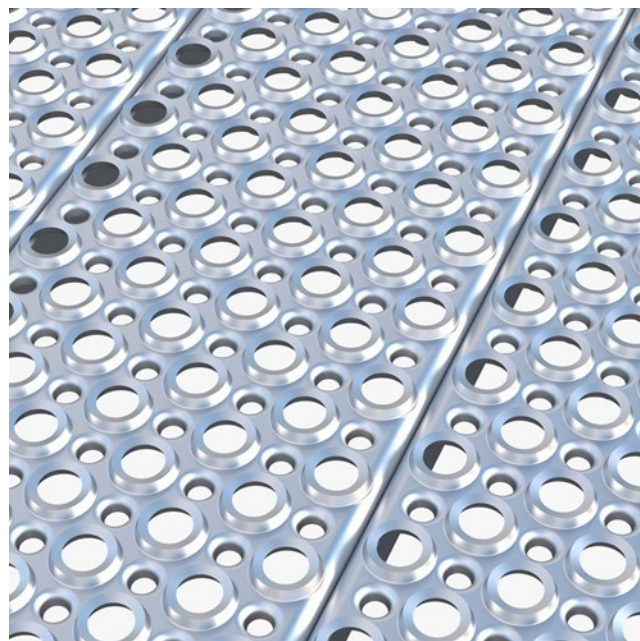

Specifications

Displacement space	V10 acc. to DIN 51130
PTV guidelines	36+ Low Slip Potential
Dry PTV average	73
Wet PTV average	51
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

Suitable application areas

Access Walkways & Maintenance Platforms

Balconies

Accessories

Fixing clip, lower part 03

Related products

Plank Extr. 03


Plank 03

Fixing clip, lower part 03

Other materials available

Steel

Stainless steel

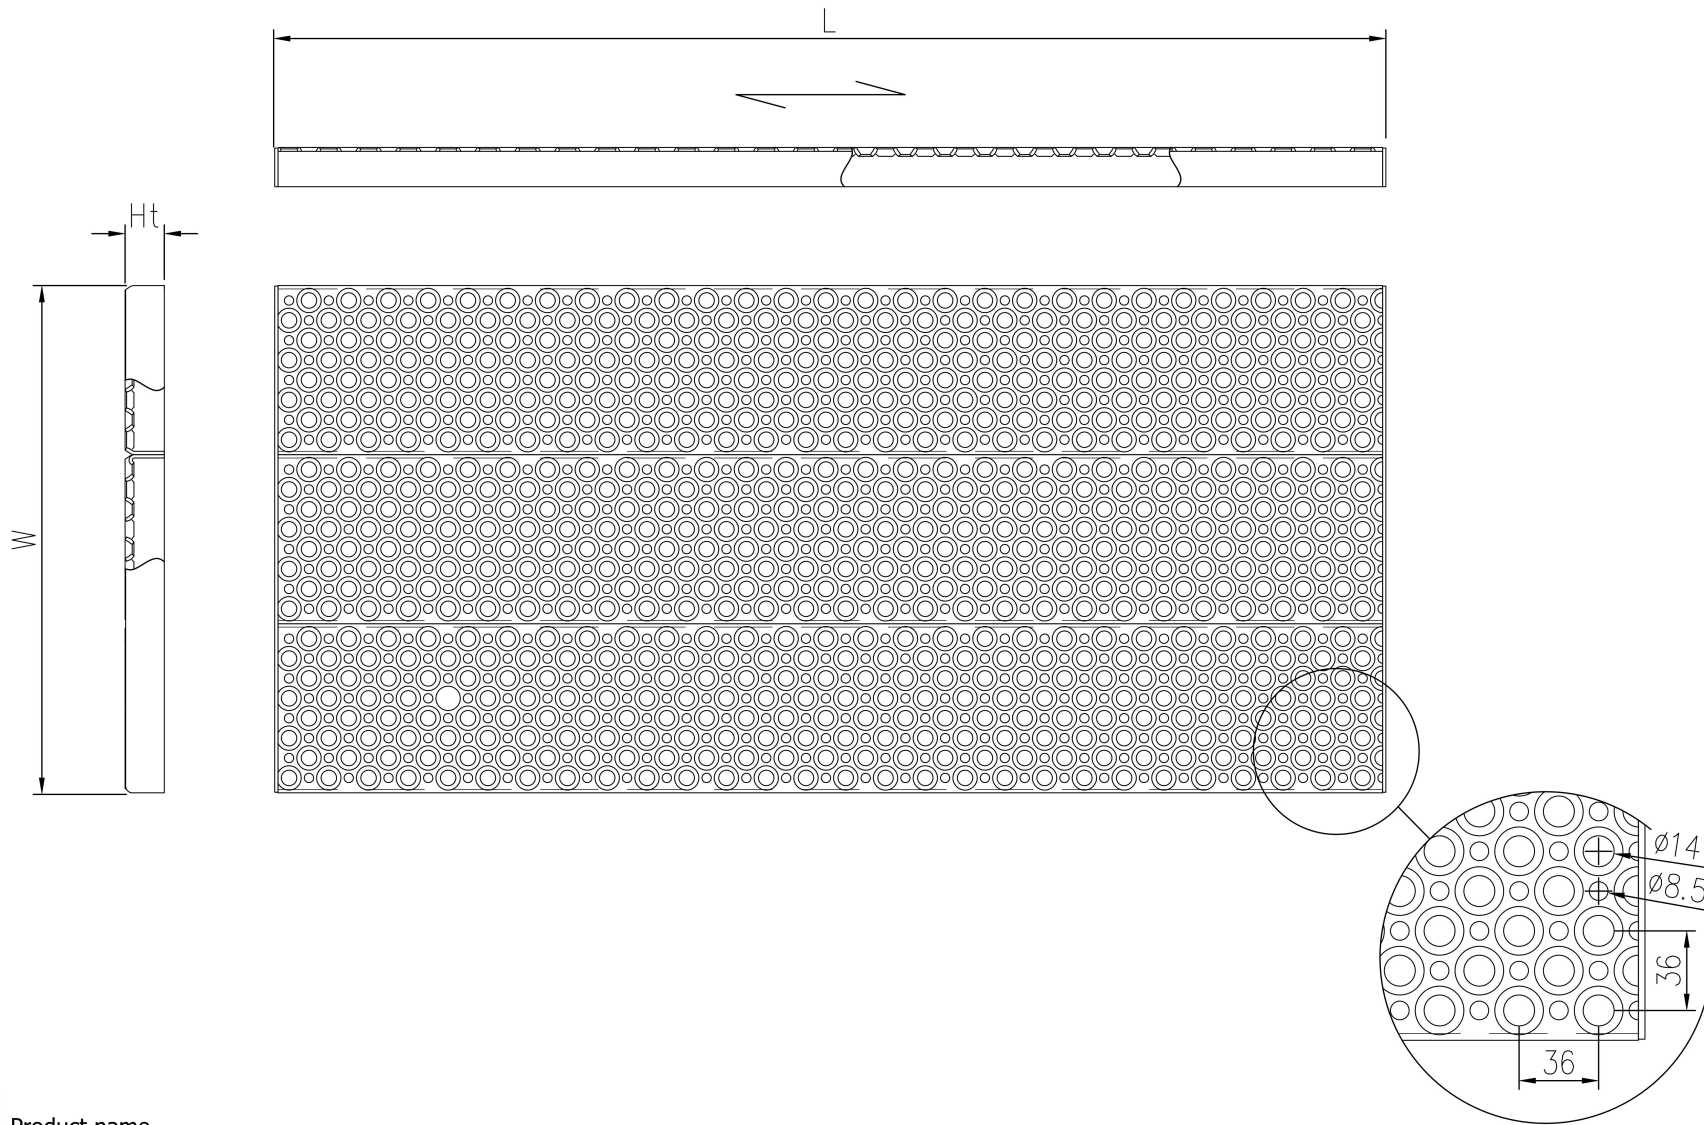

PcP Product name
OPTIMO Plank grating O3