




# Plank Grating 03

## Aluminium

Safety gratings Type 03™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type 03™ are produced in different dimensions and profiles.

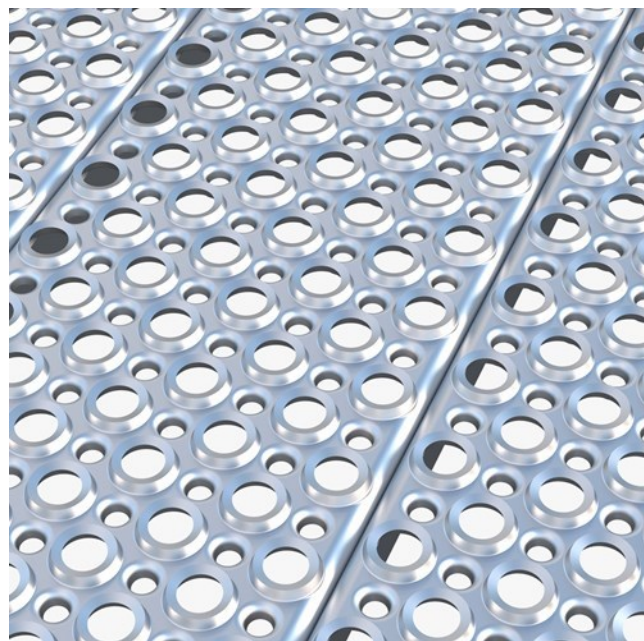

### Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	73 multi-directional acc. to BS 7976
Wet PTV average	51 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14 mm
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592

### Suitable application areas

Access Walkways & Maintenance Platforms

Balconies



**Accessories**

---

Fixing Clip, Lower Part 03

---

**Related products**

---

Plank Extr. 03

---

Plank 03

---

Fixing Clip, Lower Part 03


---

**Other materials available**

---

Stainless steel

---

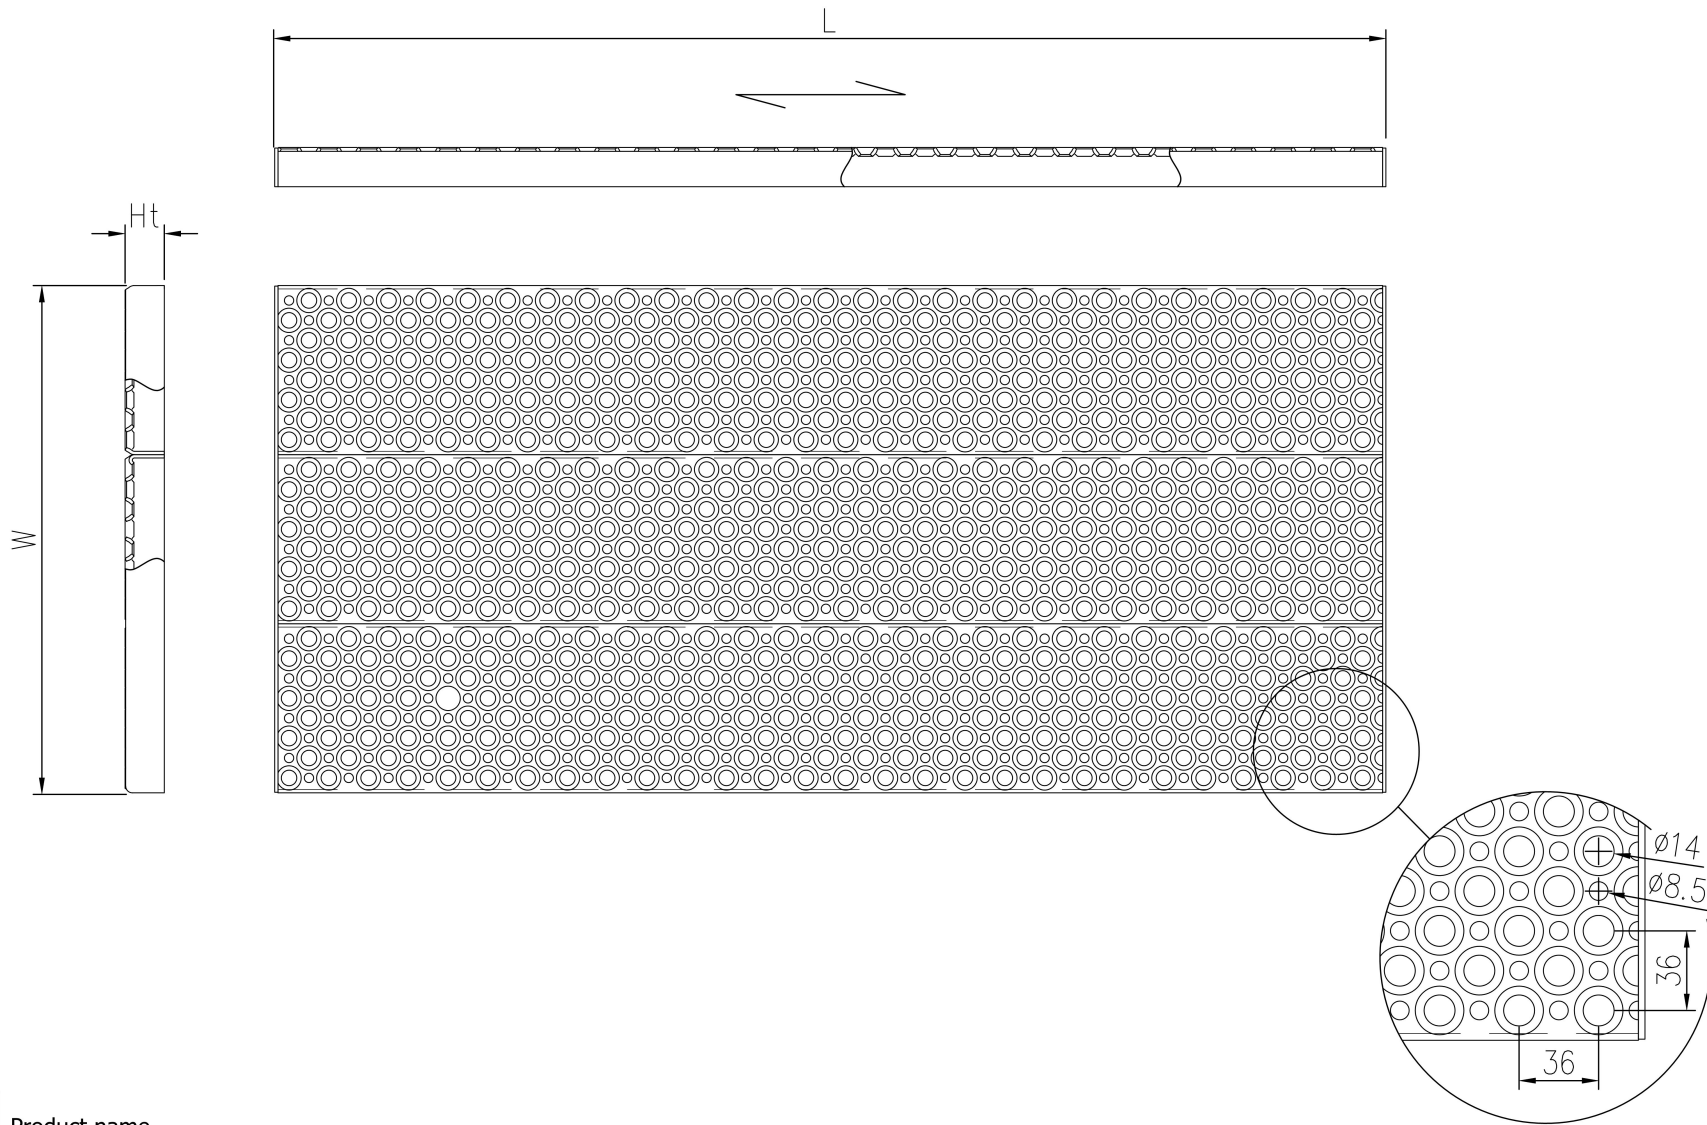

**PcP** Product name  
OPTIMO Plank grating O3