


Plank grating O3

Steel

Safety gratings Type O3™ are applied where slip resistance and strength is required. Punched and drainage holes gives the gratings optimal strength/weight ratio. Gratings Type O3™ are produced in different dimensions, materials and profiles.

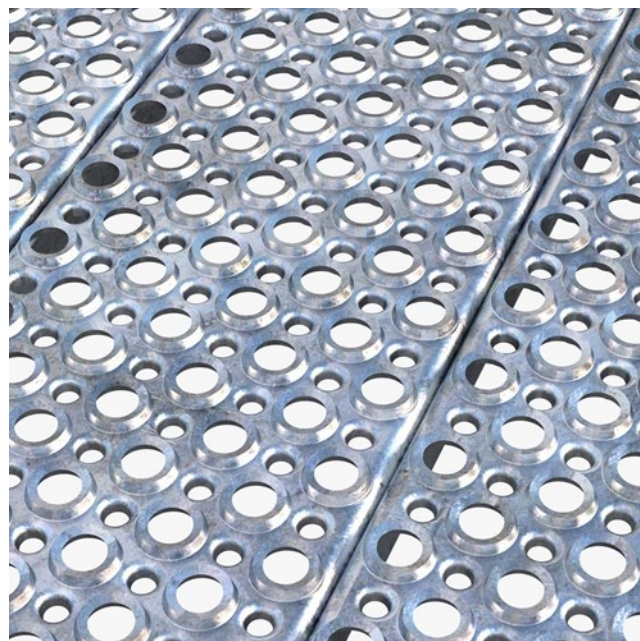

Specifications

Displacement space	V10 acc. to DIN 51130
PTV guidelines	36+ Low Slip Potential
Dry PTV average	73
Wet PTV average	51
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	28-32 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 8,5 mm
C-C grid	36 x 36 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms

Vehicular

Accessories

Fixing clip UNI ø8

Fixing clip, lower part O3

Fixing clip UNI ø6

Related products

Plank O3

Fixing clip UNI ø8

Fixing clip, lower part O3


Tread O3

Fixing clip UNI ø6

Other materials available

Stainless steel

Aluminium 3005-16 H66

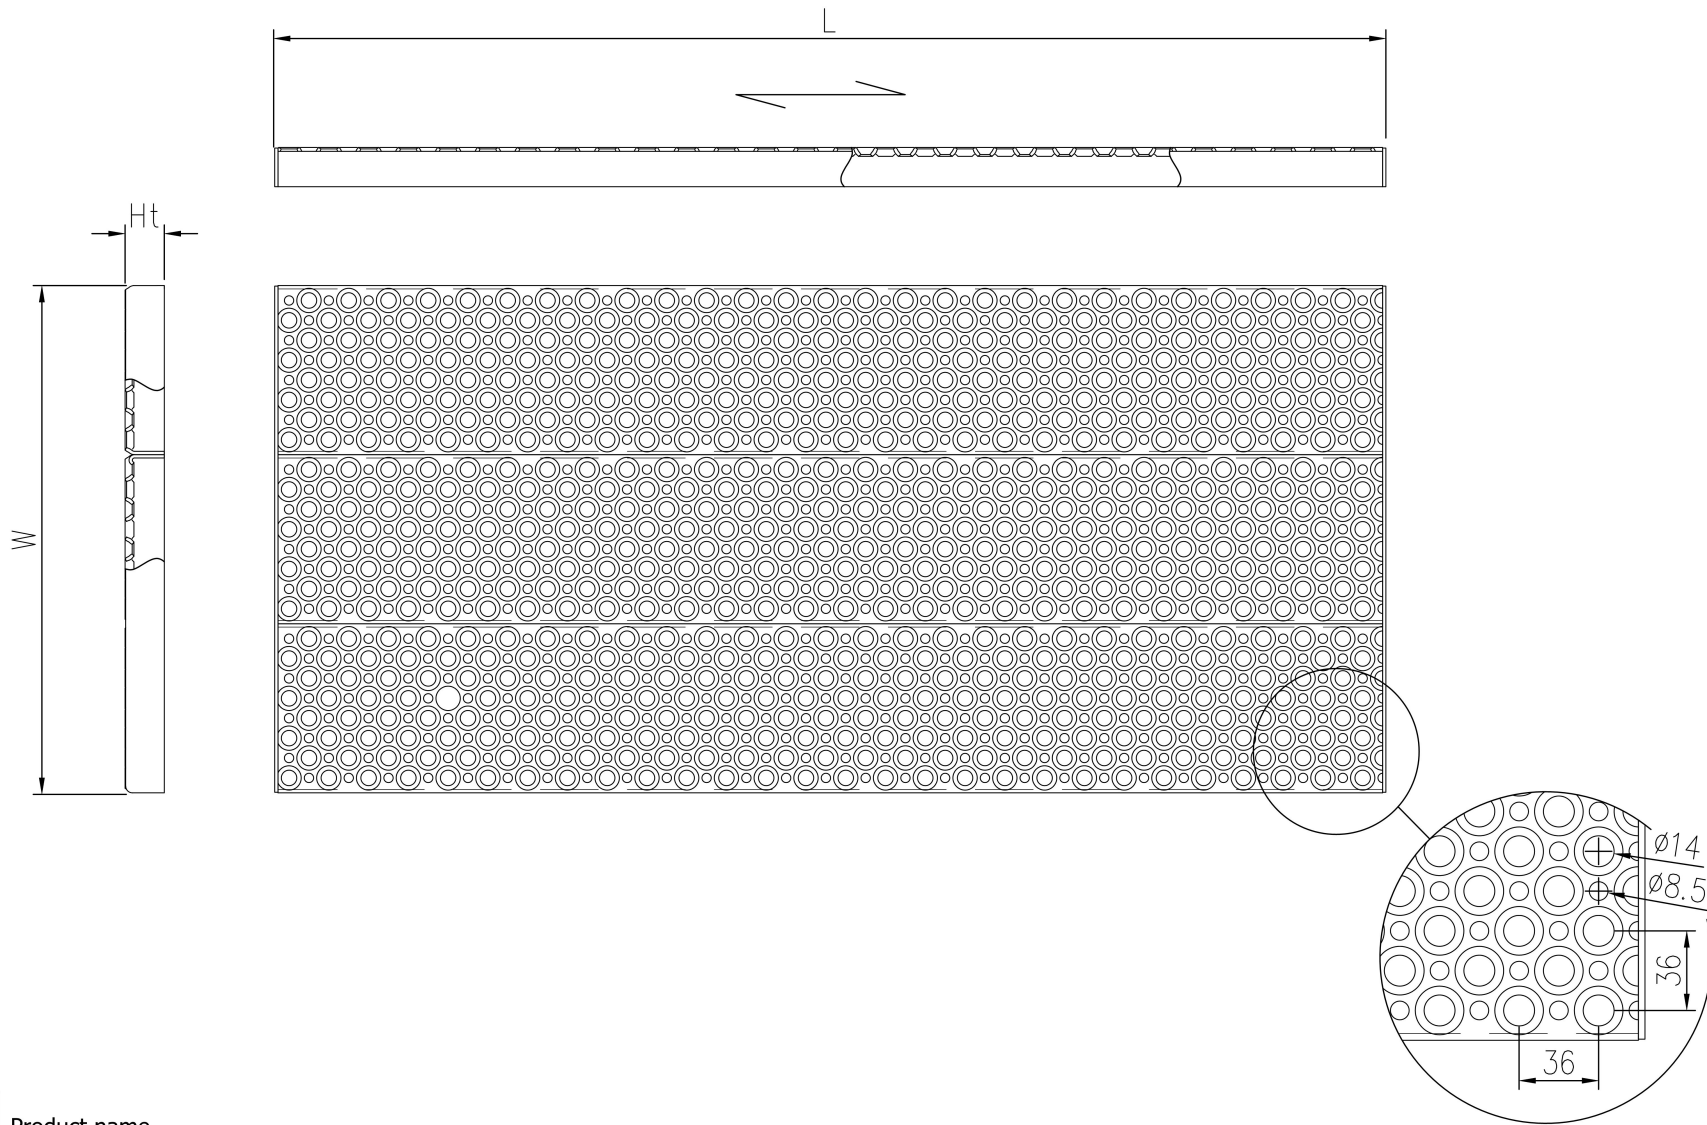

PcP Product name
OPTIMO Plank grating O3