


Plank grating O2

Safety gratings Type O2™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type O2™ are produced in different dimensions and profiles.

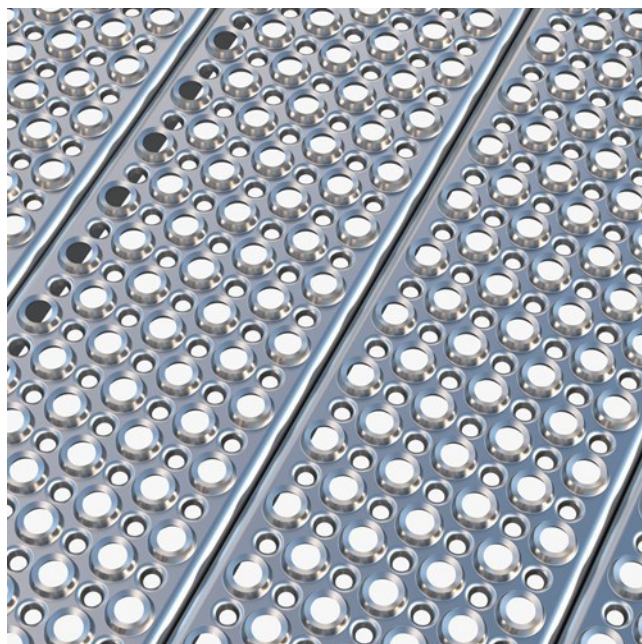

Specifications

| | |
|-------------------------|---|
| Displacement space | V10 acc. to DIN 51130 |
| PTV guidelines | 36+ Low Slip Potential |
| Dry PTV average | 66 |
| Wet PTV average | 50 |
| Slip resistance | R13 = slope >35° acc. to DIN 51130 |
| Free area | 20-25 % |
| Upward grip holes | dia. 9 |
| Downward drainage holes | dia. 5 mm |
| C-C grid | 25 x 25 mm |
| Ball proof | 15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2 |

Suitable application areas

Access Walkways & Maintenance Platforms

Balconies

Featured cases

Magheracross Viewing Platform - Causeway Coast, England

Accessories

Fixing clip, lower part 02

Related products

Plank 02



Fixing clip, lower part 02

Tread 02

Other materials available

Steel

Aluminium 3005-16 H66

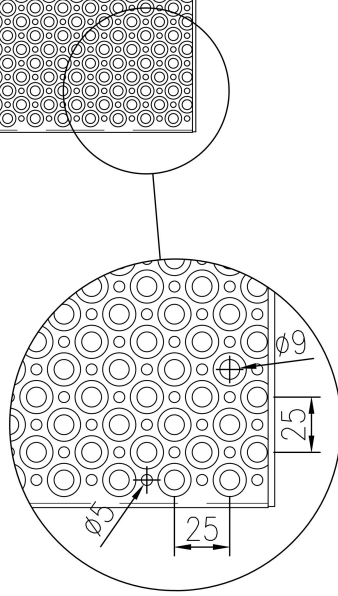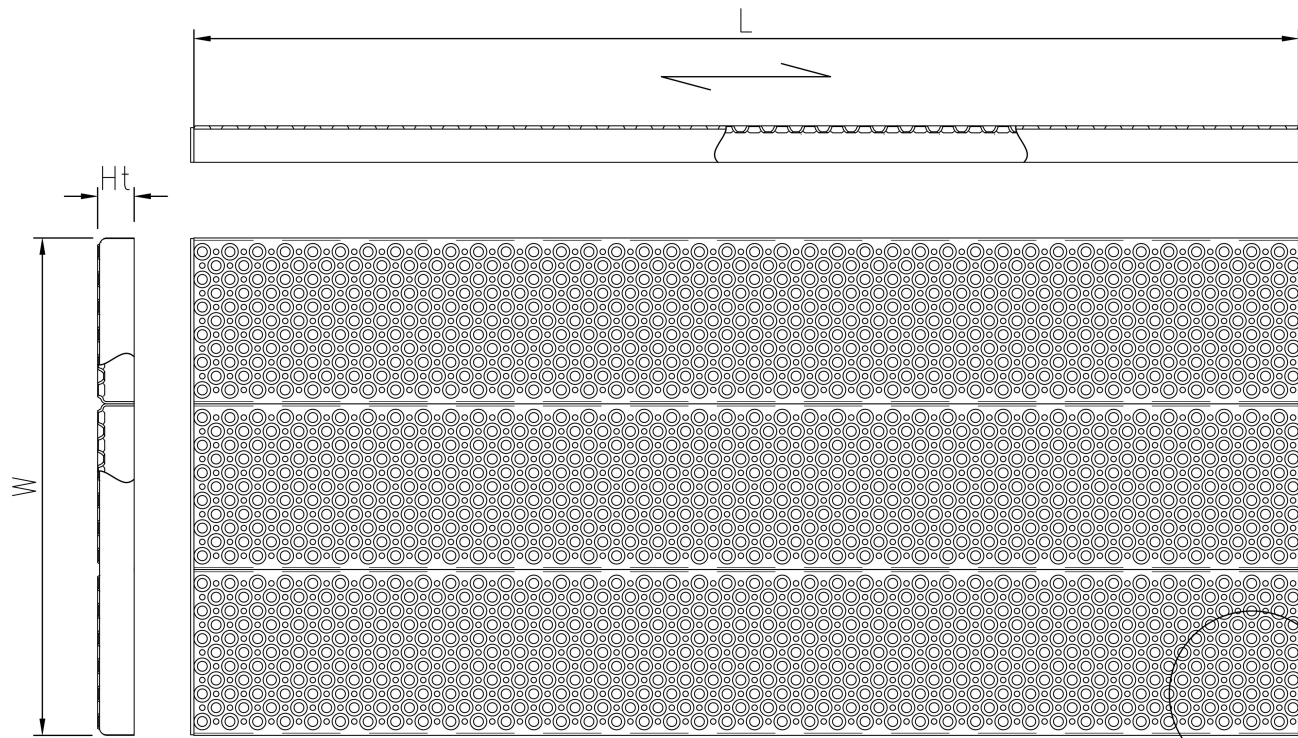

PcP Product name
OPTIMO Plank Grating O2