




# Plank Grating 02

## Stainless steel

Safety gratings Type 02™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type 02™ are produced in different dimensions and profiles.

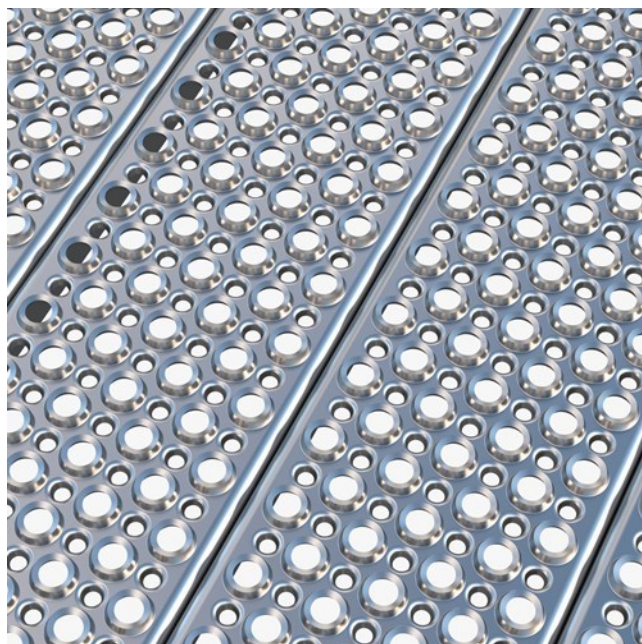

### Specifications

PTV guidelines	36+ Low Slip Potential acc. to BS 7976
Dry PTV average	66 multi-directional acc. to BS 7976
Wet PTV average	50 multi-directional acc. to BS 7976
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9 mm
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Ball proof	15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592

### Suitable application areas

Access Walkways & Maintenance Platforms

Balconies



## Featured cases

---

Magheracross Viewing Platform - Causeway Coast, England

---

## Accessories

---

Fixing Clip, Lower Part 02

---

## Related products

---

Plank 02

---

Fixing Clip, Lower Part 02

---

Tread 02

---

## Other materials available



---

Steel

---

Aluminium 3005-16 H66

---

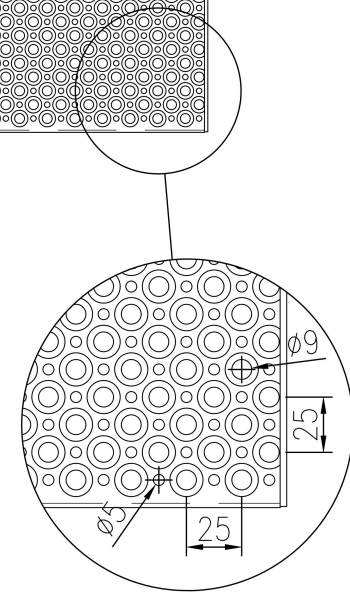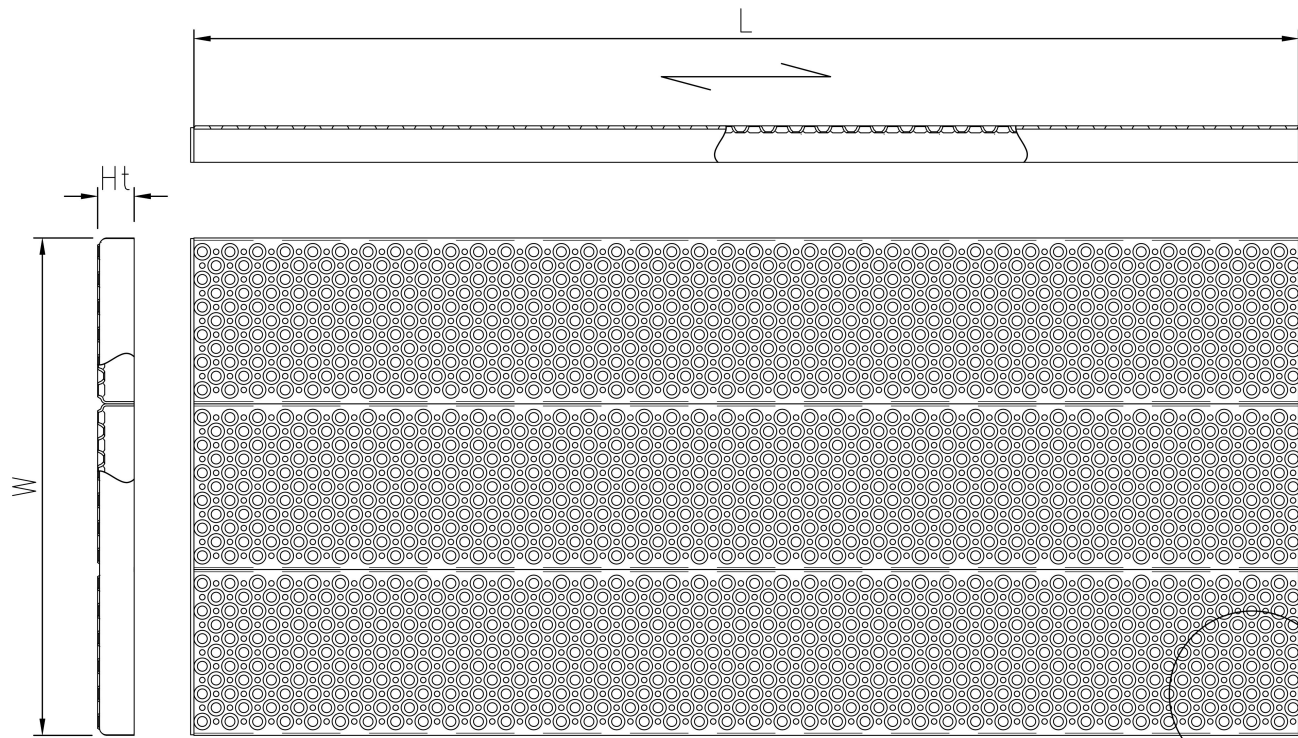

**PcP** Product name  
OPTIMO Plank Grating O2