




# Plank grating E

## Steel

Raised surface without holes. Type E is applied where a closed surface is required such as alternative to flat sheets. The panels are applied either as single elements or welded as gratings. Safety gratings Type E are characterized by raised surface without holes. Safety gratings Type E are applied where closed surfaces are required and is a strong and slip resistant alternative to deck plating.

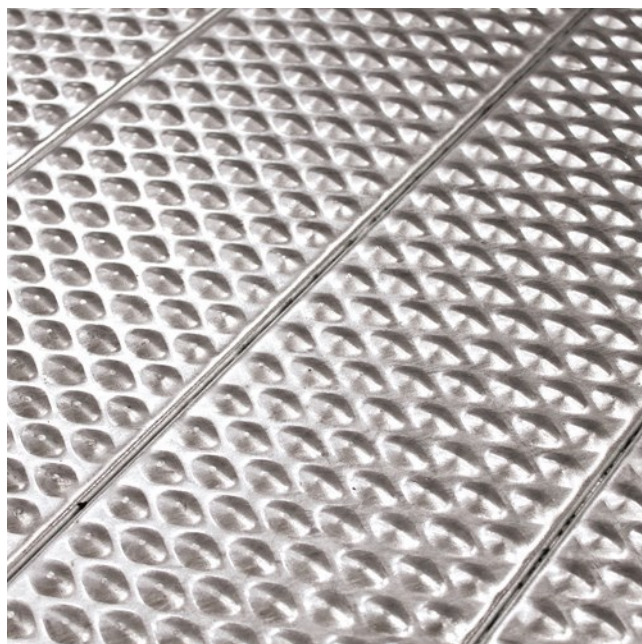

### Specifications

Displacement space	V10 acc. to DIN 51130
Heel proof	
Closed surface	
Slip resistance	R9 = 10° > slope > 6° acc. to DIN 51130
Free area	~0 %
C-C grid	35 x 20 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

### Suitable application areas

Access Walkways & Maintenance Platforms

**Related products**

---

Plank E

---

**Other materials available**


---

Stainless steel

---

Aluminium 3005-16 H66

---

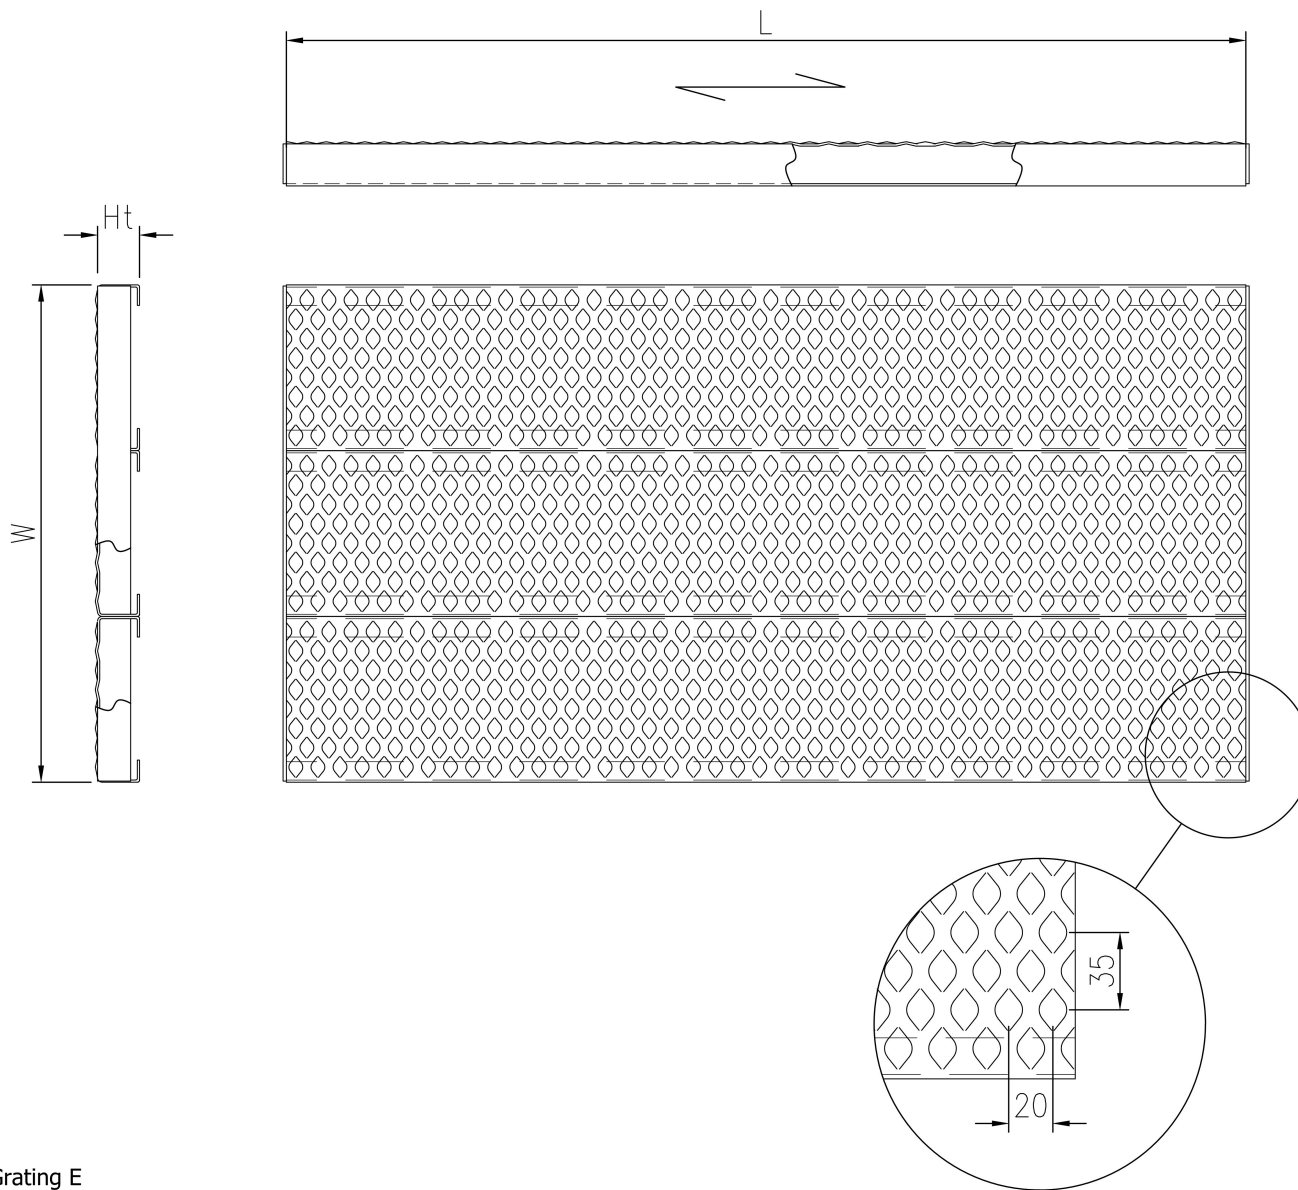

**PcP** Product name  
OPTIMO Plank Grating E