




Plank grating K

Steel

Characterizes with a smaller number of holes than the O-series. Type K is applied where an even and comfortable surface is required. Used often in stairways and residential buildings and is produced as single panels og welded as gratings.

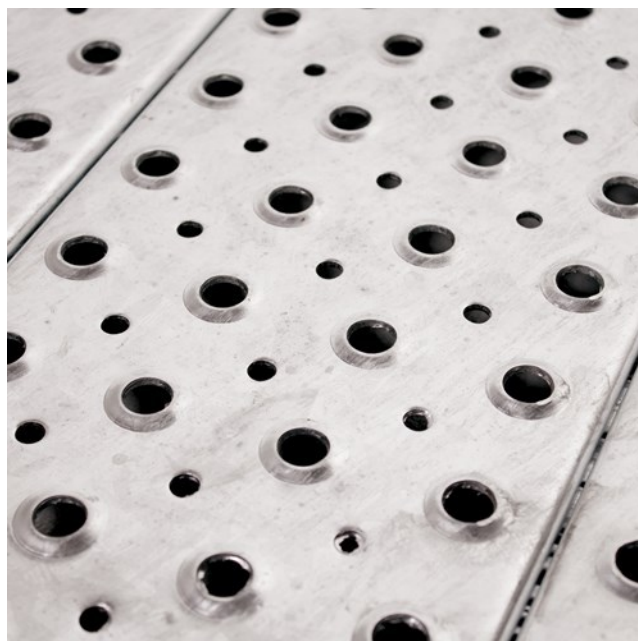

Specifications

Displacement space	V10 acc. to DIN 51130
Slip resistance	R10 = 19° > slope > 10° acc. to DIN 51130
Free area	9 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 9 mm
C-C grid	50 x 50 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Suitable application areas


Access Walkways & Maintenance Platforms

Balconies

Related products

Plank K

Spiral tread K

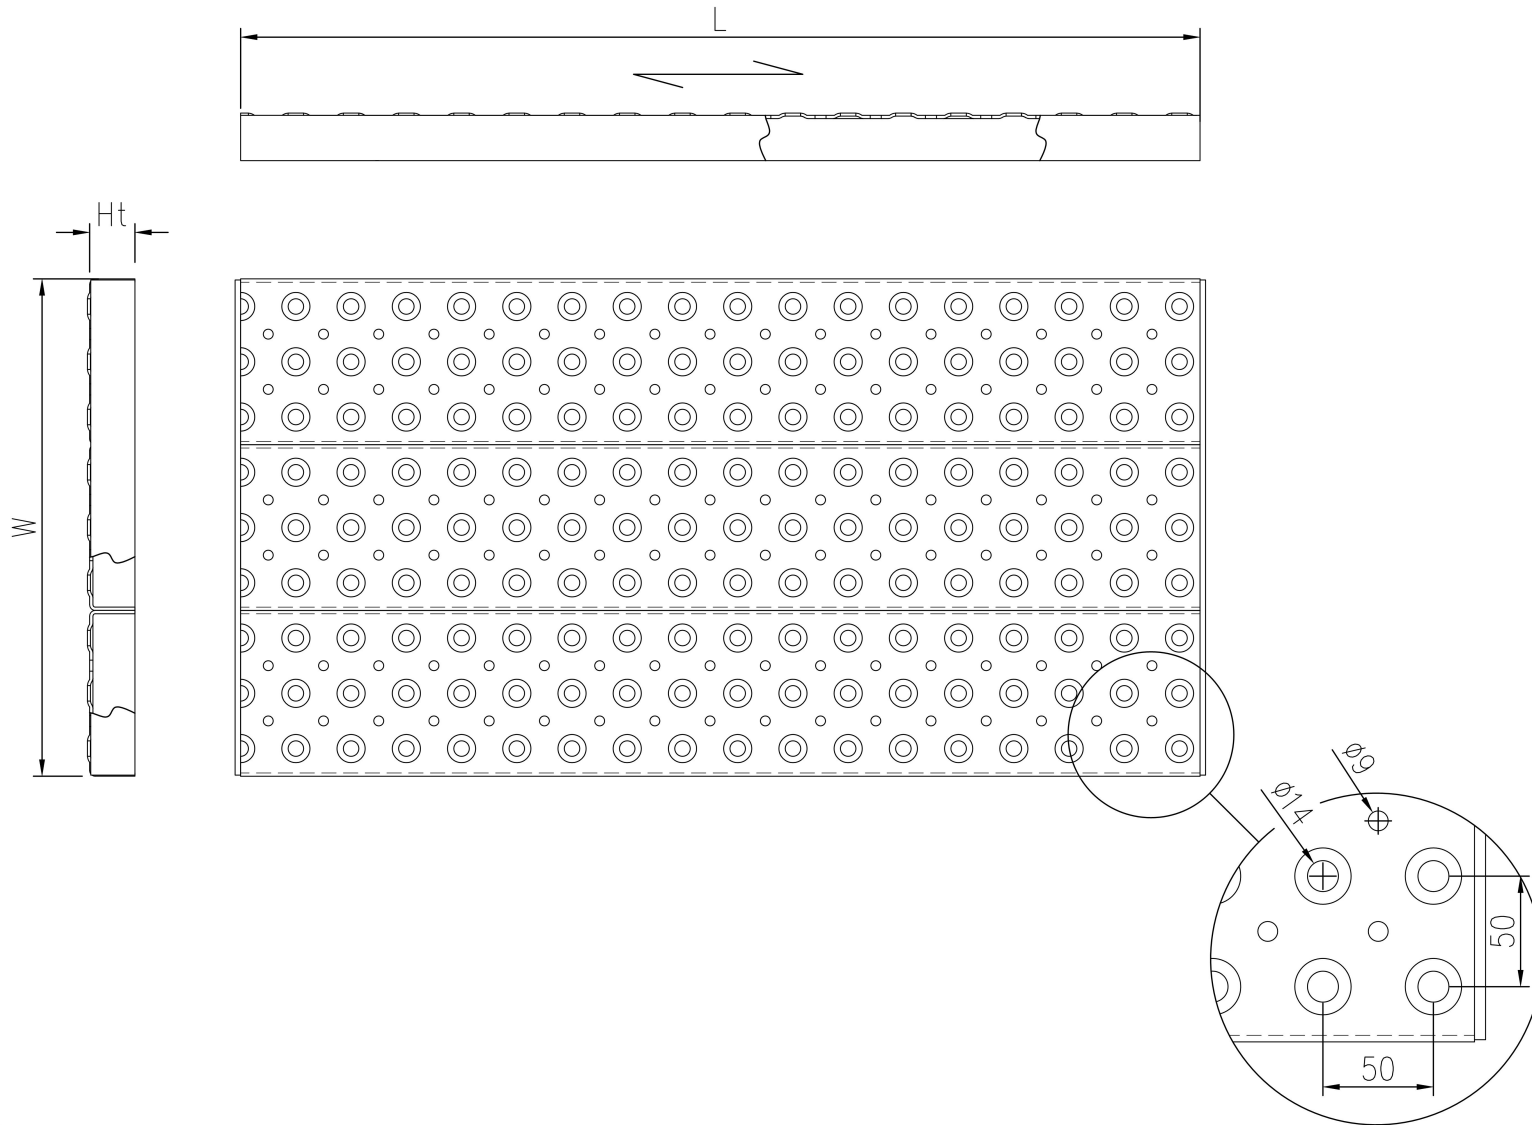

PcP

Product name
OPTIMO Plank Grating K