




Plank Grating 03

Aluminium

Safety gratings Type 03™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type 03™ are produced in different dimensions and profiles.

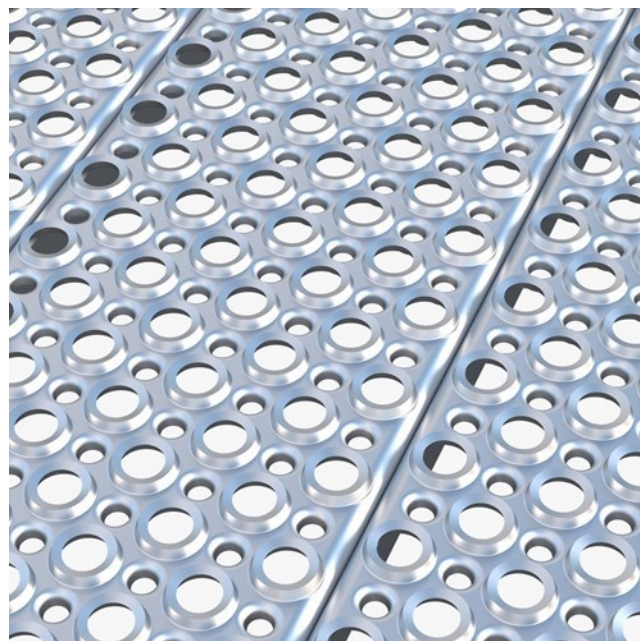

Specifications

| | |
|-------------------------|--|
| PTV guidelines | 36+ Low Slip Potential acc. to BS 7976 |
| Dry PTV average | 73 multi-directional acc. to BS 7976 |
| Wet PTV average | 51 multi-directional acc. to BS 7976 |
| Slip resistance | R13 = slope >35° acc. to DIN 51130 |
| Free area | 28-32 % |
| Upward grip holes | dia. 14 mm |
| Downward drainage holes | dia. 8,5 mm |
| C-C grid | 36 x 36 mm |
| Ball proof | 15 mm in accordance with BS 4592 20 mm in accordance with BS 4592 35 mm in accordance with BS 4592 |

Suitable application areas

Access Walkways & Maintenance Platforms

Balconies



Accessories

Fixing Clip, Lower Part 03

Related products


Plank Extr. 03

Plank 03

Fixing Clip, Lower Part 03

Other materials available

Stainless steel

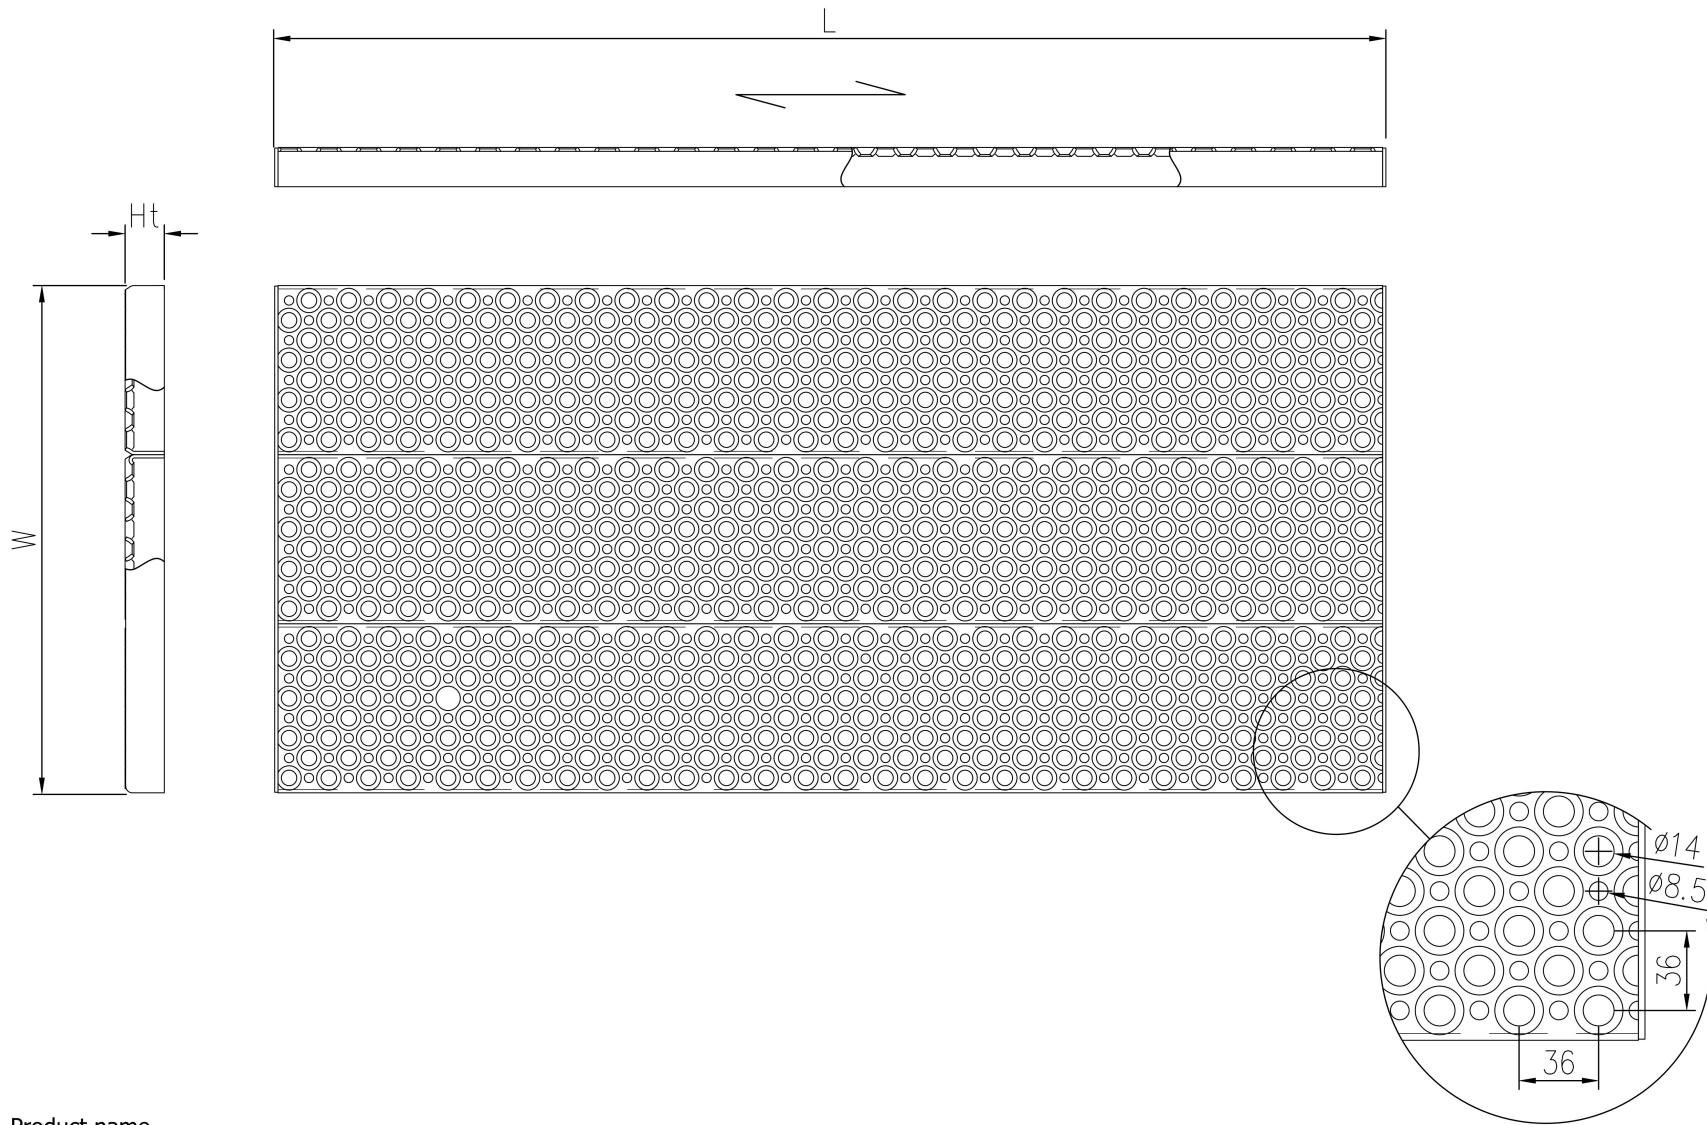

PcP Product name
OPTIMO Plank grating O3