




Plank 05

Steel 240 YP

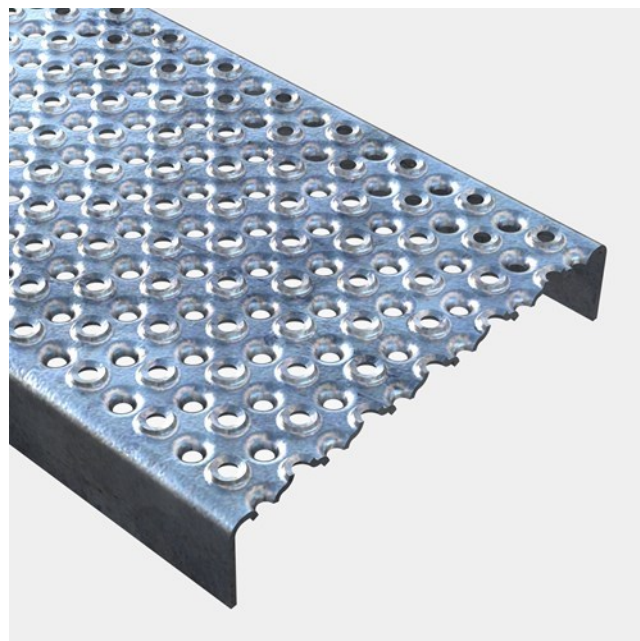

Specifications

PTV guidelines	36+ Low Slip Potential
Dry PTV average	96
Wet PTV average	79
Slip resistance	R13 = slope >35° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	8-9 %
Upward grip holes	dia. 5
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Heel proof	
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms

Public access

Escape routes

Motorway gantries



PcP
Sverigesvej 2-4 - DK-7480 Vildbjerg

+45 97 13 12 00
info@pcp-corp.com

Featured cases

Public stairs, landings and walkways - HMS Victory - Portsmouth, England

Related products

Plank grating 05

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
6000	75	33	2	Mill finish	On request	C032010100p
6000	112	33	2	Mill finish	Stock item	C032040100p
6000	125	33	2	Mill finish	On request	C032050100p
6000	137	33	2	Mill finish	On request	C032060100p
6000	150	33	2	Mill finish	Stock item	C032070100p
3000	300	45	2	Mill finish	Stock item	C042100100p
3600	200	45	2	Mill finish	Stock item	C042130100p
3600	150	45	2	Mill finish	Stock item	C042140100p
3600	200	45	2	Mill finish	Stock item	C042170100p
3600	225	45	2	Mill finish	Stock item	C042180100p
3600	250	45	2	Mill finish	Stock item	C042190100p
3000	200	45	2	Mill finish	Stock item	C042200100p

