



Plank K

Steel 240 YP



Specifications

Slip resistance	R10 = 19° > slope > 10° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	9 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 9 mm
C-C grid	50 x 50 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms
Balconies




Related products

Spiral tread K

Plank grating K

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
3000	150	45	3	Mill finish	On request	C039000100p

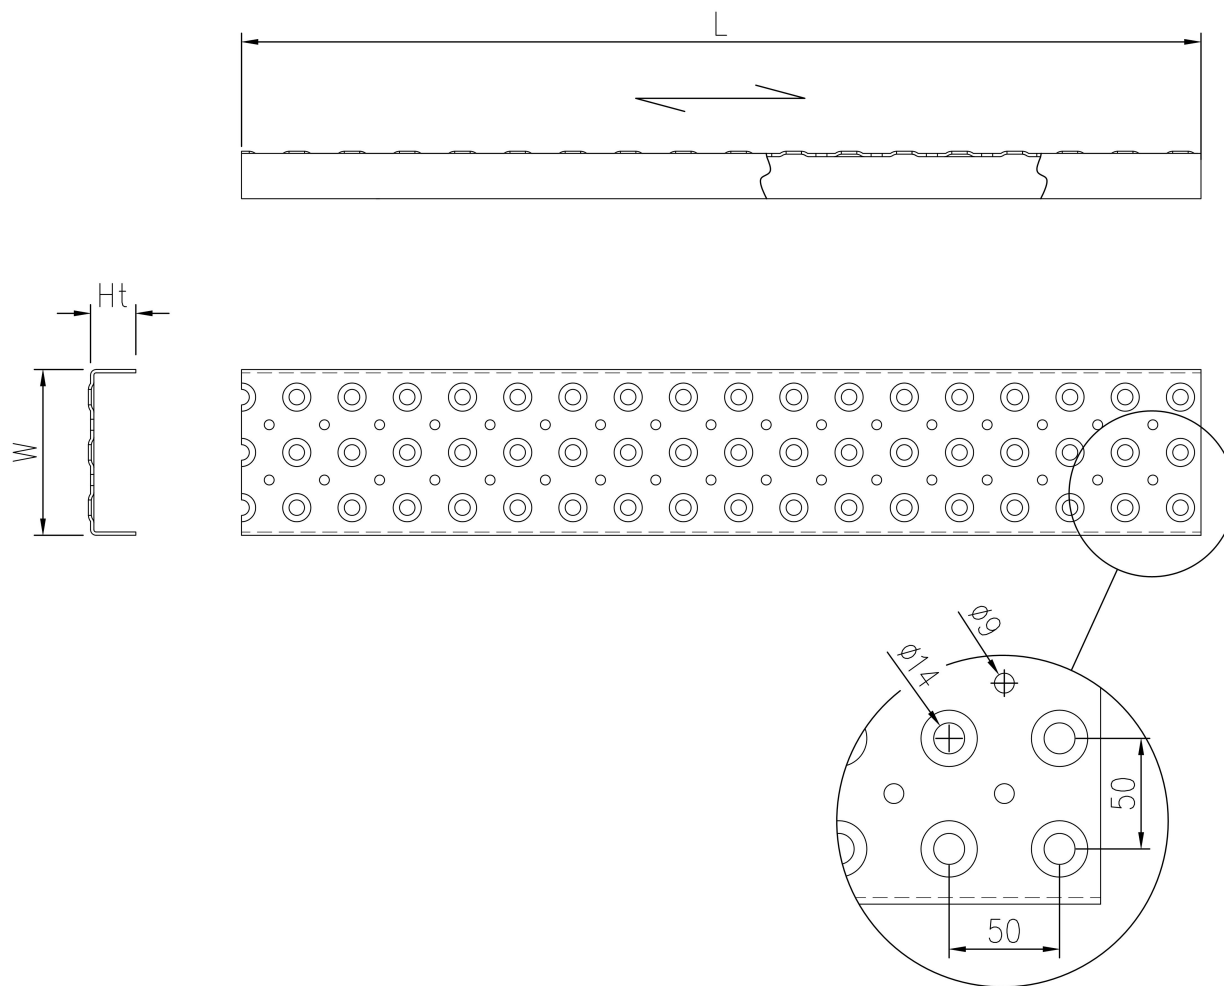

Product name
OPTIMO Plank K