




Plank G

Steel 240 YP

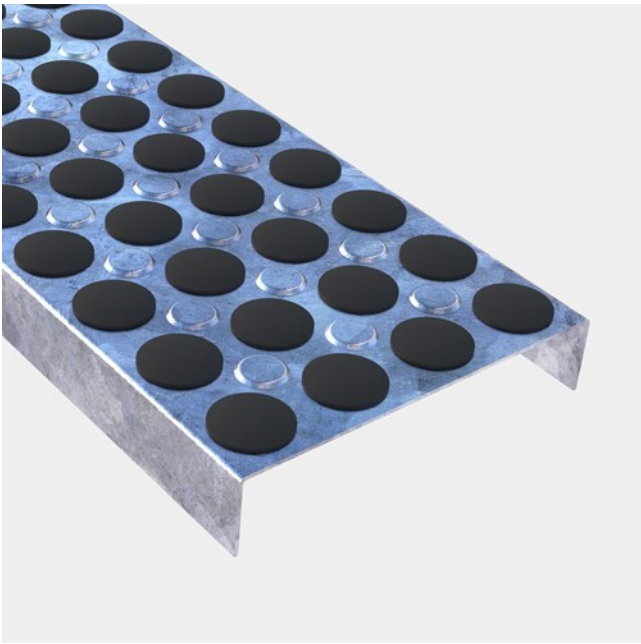

Specifications

Displacement space	V10 acc. to DIN 51130
Free area	~0 %
C-C grid	50 x 50 mm
Heel proof	
Closed surface	
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Suitable application areas

Access Walkways & Maintenance Platforms
Inside stairs and landings



Related products

Plank grating G

Tread G

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
3000	250	44	3	Mill finish	On request	C038020100p

