



# Tread 03

## Steel



### Specifications

|                                      |                                    |
|--------------------------------------|------------------------------------|
| PTV guidelines                       | 36+ Low Slip Potential             |
| Dry PTV average                      | 73                                 |
| Wet PTV average                      | 51                                 |
| Slip resistance                      | R13 = slope >35° acc. to DIN 51130 |
| Displacement space                   | V10 acc. to DIN 51130              |
| Free area                            | 28-32 %                            |
| Upward grip holes                    | dia. 14                            |
| Downward drainage holes              | dia. 8,5 mm                        |
| C-C grid                             | 36 x 36 mm                         |
| Fire resistance Critical temperature | 550 °C                             |

### Suitable application areas






|                     |
|---------------------|
| Straight staircases |
|---------------------|



**Related products**

Plank 03

Plank grating 03

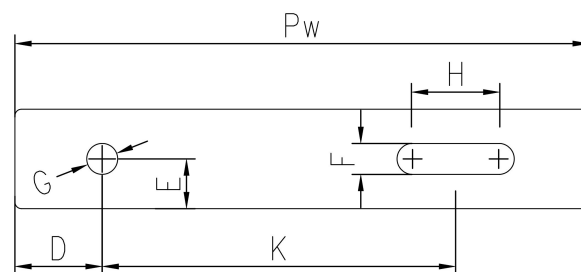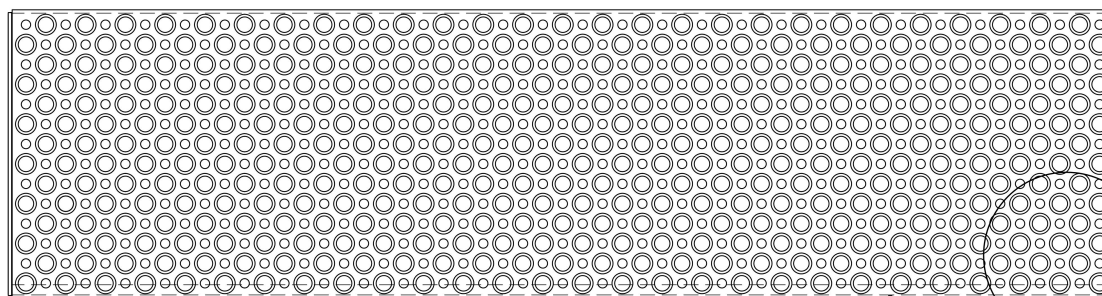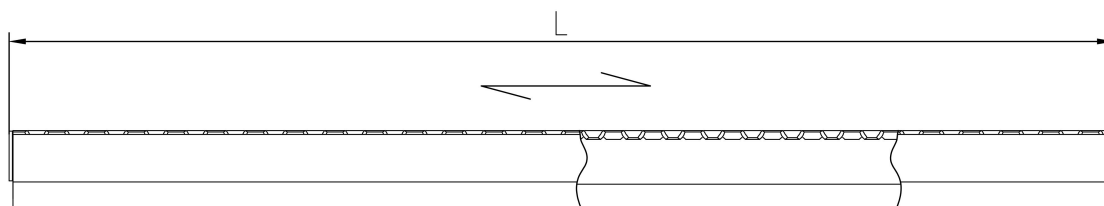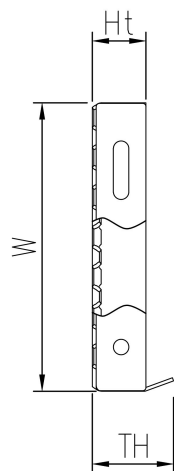

Product name  
OPTIMO Tread O3