




Plank grating Round

Steel 240 YP

Punched hole mesh gratings CUBE™ has a high strength-to-weight ratio which means that strength is maintained while weight is reduced. The greater the span, the lower is the weight – in relation to pressure-locked mesh gratings. The CUBE™ grating can be produced in three design variants depending on how much slip resistance is needed. CUBE™ mesh gratings are recommended in most constructions and industries where high air- or liquid flow are required.

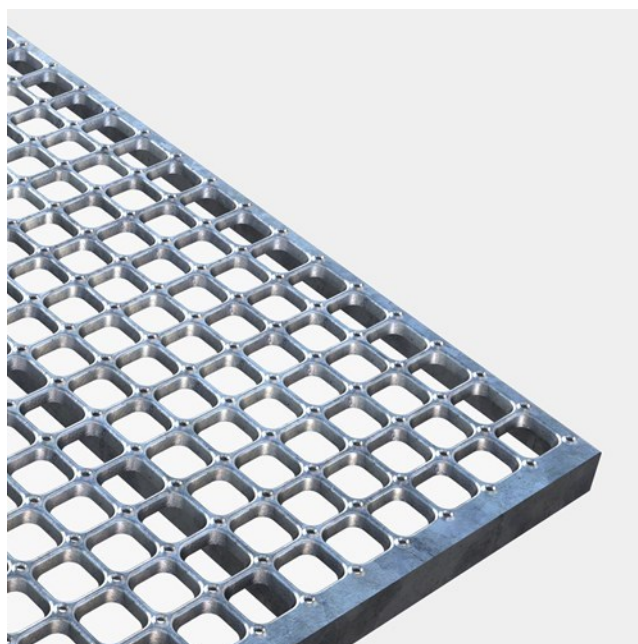

Specifications

Free area	50-56 %
Upward grip holes	dia. 5
Downward drainage holes	34x34 mm
C-C grid	43,5 x 43,5 mm
Ball proof	35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

Accessories

Fixing clip, upper part	Ma44/CUBE
Fixing clip, lower part	

Related products

Fixing clip, upper part	Ma44/CUBE
Fixing clip, lower part	
Plank grating	Plain
Plank grating	Oyster
Plank grating	Dimple

Other materials available

Stainless steel
