



Tread 02

Steel 240 YP



Specifications

PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Fire resistance Critical temperature	550 °C

Suitable application areas

Straight staircases



Related products






Tread plank ACHIL O2
Plank grating O2
Tread ACHIL O2
Tread ACHIL VISUAL O2
Tread BUILD VISUAL O2

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
500	150	33	2	Mill finish	Stock item	F120010100

Other materials available

Stainless steel AISI 304
Stainless steel AISI 31Stainless steel A

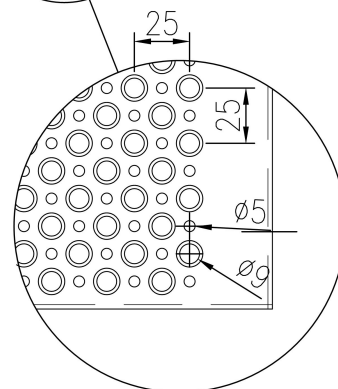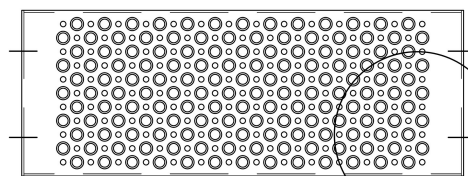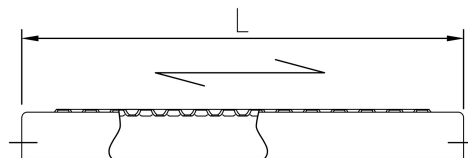

Product name
OPTIMO Tread O2