




# Plank grating Oyster

## Stainless steel

Punched hole mesh gratings CUBE™ Oyster™ has a high strength-to-weight ratio which means that strength is maintained while weight is reduced. The greater the span, the lower is the weight – in relation to pressure-locked mesh gratings. CUBE™ Oyster mesh gratings are recommended in industries where hygiene and high air- or liquid flow are required.

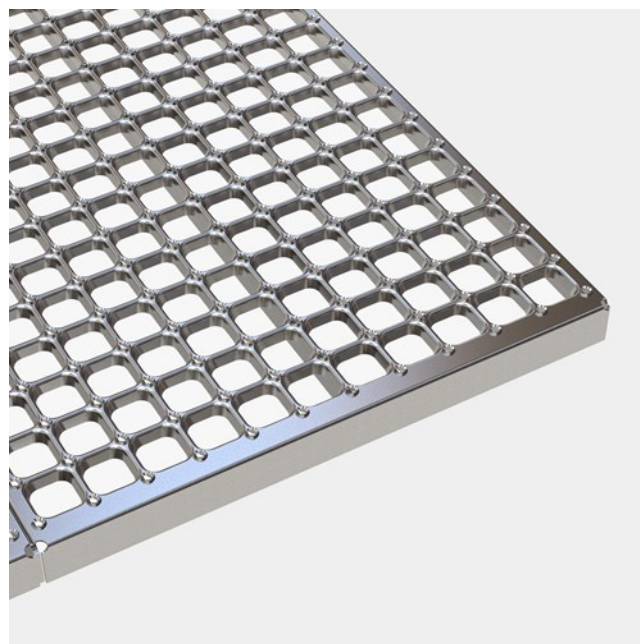

### Specifications

|                         |                                         |
|-------------------------|-----------------------------------------|
| Displacement space      | V10 acc. to DIN 51130                   |
| PTV guidelines          | 36+ Low Slip Potential                  |
| Dry PTV average         | 104                                     |
| Wet PTV average         | 70                                      |
| Slip resistance         | R13 = slope >35° acc. to DIN 51130      |
| Free area               | 50-56 %                                 |
| Upward grip holes       | Oyster - serrated dia 6,5               |
| Downward drainage holes | 34x34 mm                                |
| C-C grid                | 43,5 x 43,5 mm                          |
| Ball proof              | 35 mm in accordance with EN ISO 14122-2 |

### Suitable application areas

Access Walkways & Maintenance Platforms

Landings

**Accessories**

Fixing clip, lower part

Fixing clip, upper part

**Related products**

Plank grating Plain

Plank grating Dimple

Plank grating Round

Fixing clip, lower part

Fixing clip, upper part

**Other materials available**

Steel 240 YP

