



Plank E

Steel 240 YP



Specifications

Slip resistance	R9 = 10° > slope > 6° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	~0 %
C-C grid	35 x 20 mm
Heel proof	
Closed surface	
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C


Suitable application areas

Related products

Plank grating E

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
3000	250	40	2	Mill finish	On request	C036020100p

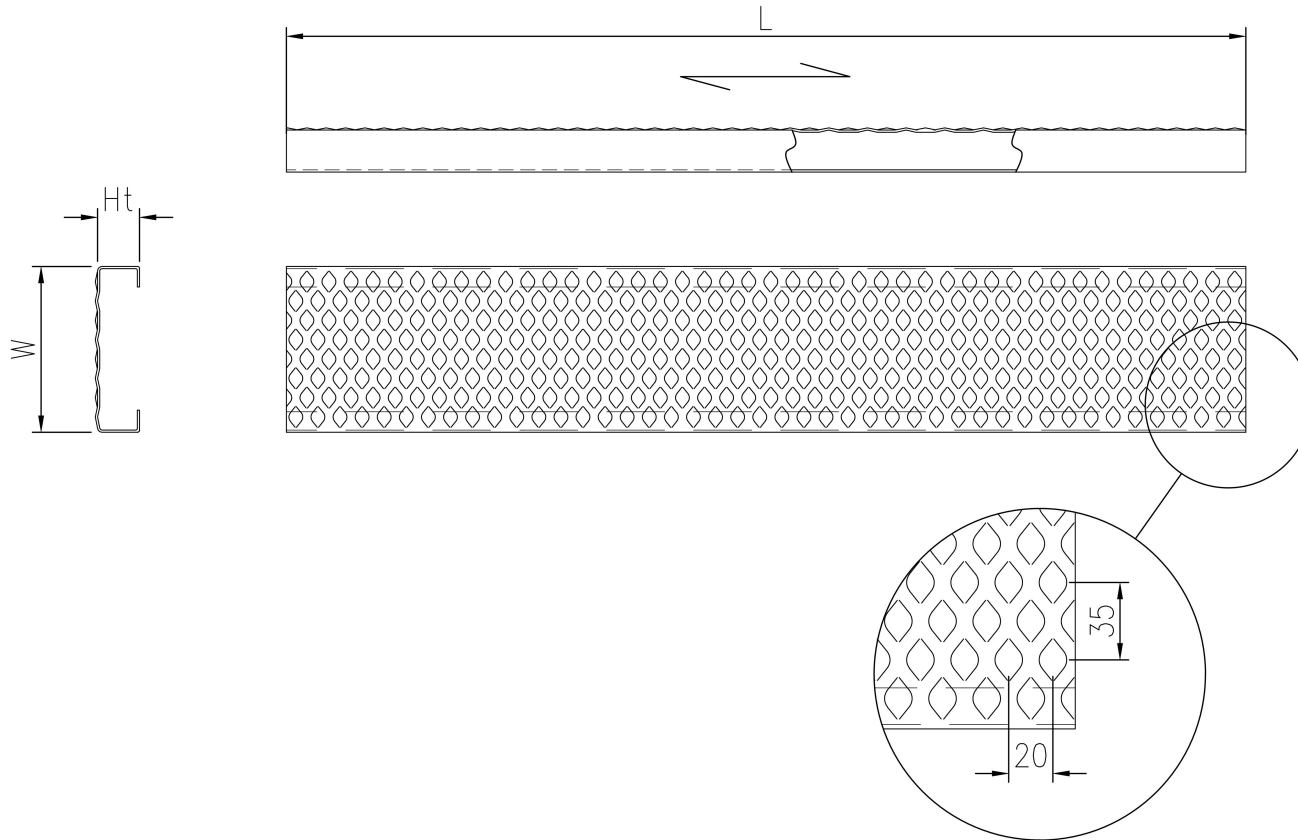

Product name
OPTIMO Plank E