


# Plank grating K

## Steel

Characterizes with a smaller number of holes than the O-series. Type K is applied where an even and comfortable surface is required. Used often in stairways and residential buildings and is produced as single panels og welded as gratings.

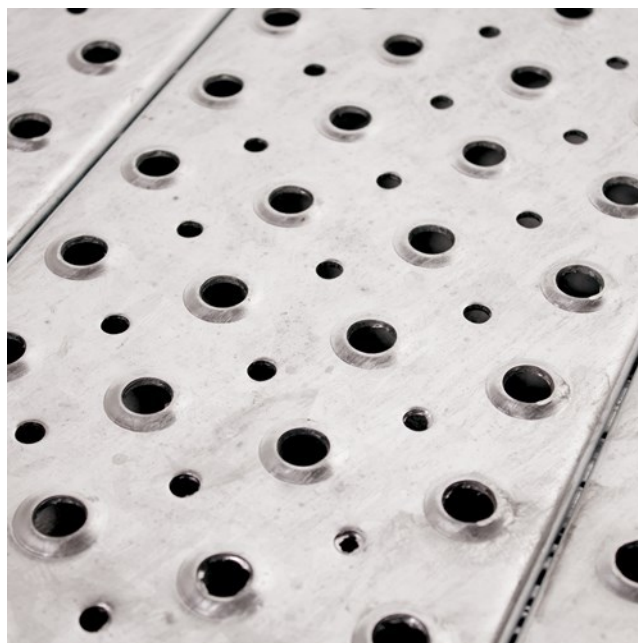

### Specifications

Displacement space	V10 acc. to DIN 51130
Slip resistance	R10 = 19° > slope > 10° acc. to DIN 51130
Free area	9 %
Upward grip holes	dia. 14
Downward drainage holes	dia. 9 mm
C-C grid	50 x 50 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2
Fire resistance Critical temperature	550 °C

### Suitable application areas

Access Walkways & Maintenance Platforms  
Balconies

## Related products


---

Plank K

---

Spiral tread K

---

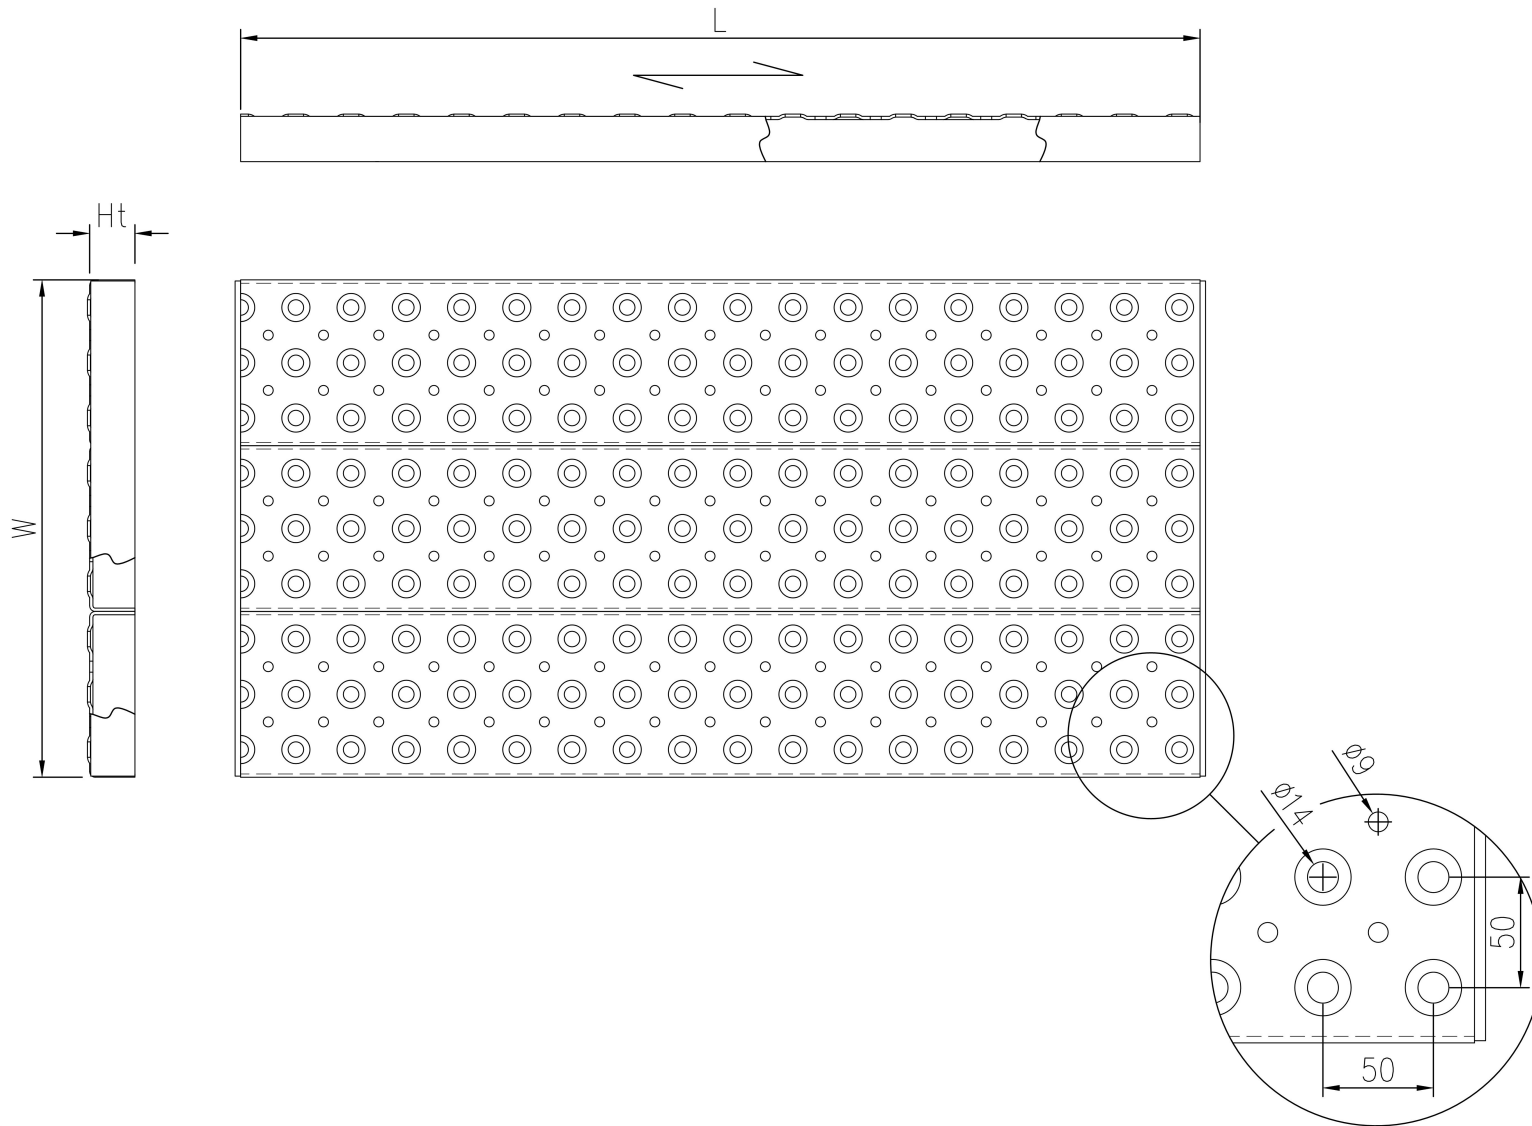

**PcP** Product name  
OPTIMO Plank Grating K