




# Plank grating Oyster

## Stainless steel

Punched hole mesh gratings CUBE™ Oyster™ has a high strength-to-weight ratio which means that strength is maintained while weight is reduced. The greater the span, the lower is the weight – in relation to pressure-locked mesh gratings. CUBE™ Oyster mesh gratings are recommended in industries where hygiene and high air- or liquid flow are required.

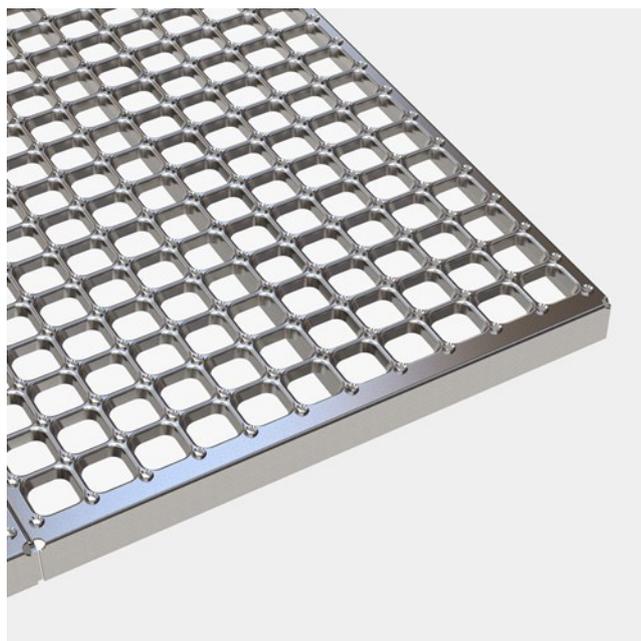

### Specifications

Displacement space	V10 acc. to DIN 51130
PTV guidelines	36+ Low Slip Potential
Dry PTV average	104
Wet PTV average	70
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	50-56 %
Upward grip holes	Oyster - serrated dia 6,5
Downward drainage holes	34x34 mm
C-C grid	43,5 x 43,5 mm
Ball proof	35 mm in accordance with EN ISO 14122-2

### Suitable application areas

Access Walkways & Maintenance Platforms

Landings

**Accessories**

---

Fixing clip, lower part

---

Fixing clip, upper part

---

**Related products**

---

Plank grating Plain

---

Plank grating Dimple

---

Plank grating Round

---

Fixing clip, lower part

---

Fixing clip, upper part




---

**Other materials available**

---

Steel 240 YP

---

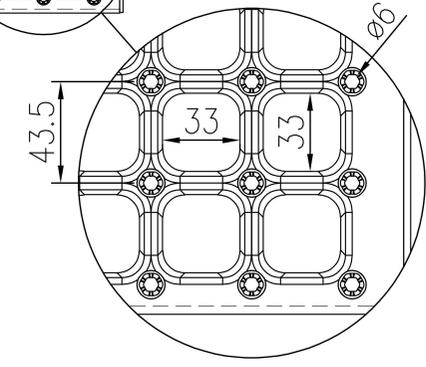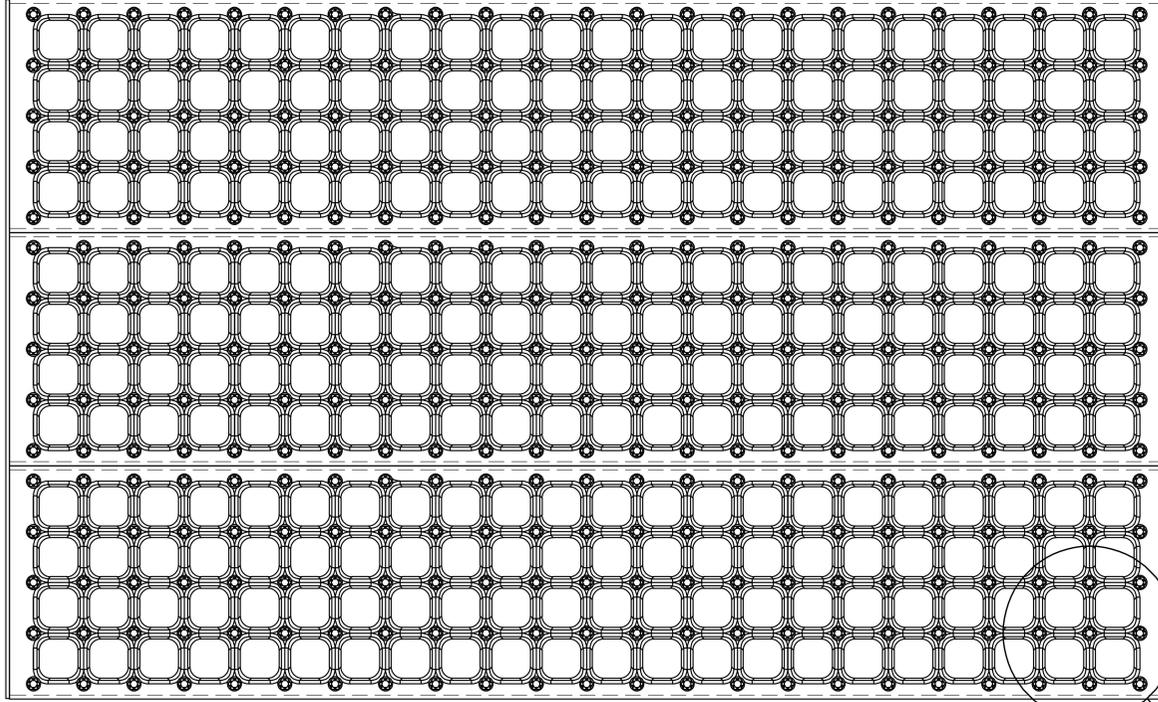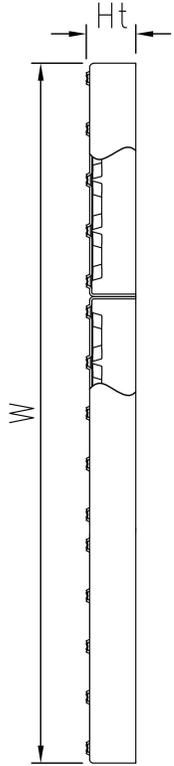

**PCP** Product name  
CUBE Plank Grating Oyster