



# Plank 02

Stainless steel AISI 316



## Specifications


PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm
Ball proof	15 mm in accordance with EN ISO 14122-2 20 mm in accordance with EN ISO 14122-2 35 mm in accordance with EN ISO 14122-2

## Featured cases

Magheracross Viewing Platform - Causeway Coast, England

### Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
3000	200	45	2	Mill finish	Stock item	C010124200p
3000	62	33	2	Mill finish	On request	C010184200p
3000	75	33	2	Mill finish	On request	C010194200p
3000	100	33	2	Mill finish	On request	C010214200p
3000	125	33	2	Mill finish	On request	C010234200p
3000	150	33	2	Mill finish	Stock item	C010254200p
3000	50	33	2	Mill finish	Stock item	C010174200p

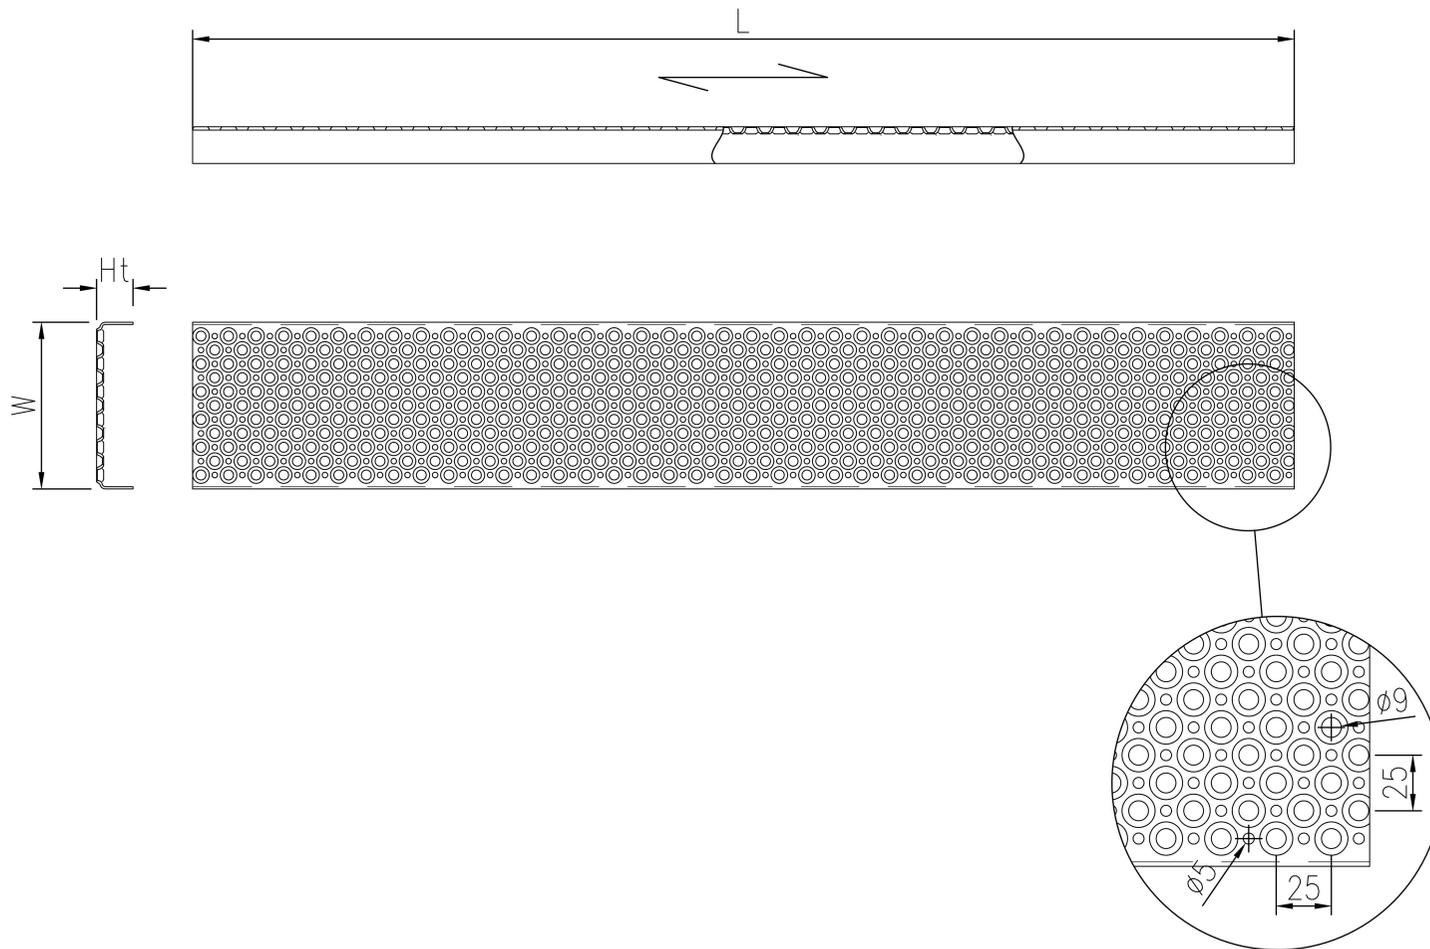

PcP

Product name  
OPTIMO Plank O2