



Tread 02

Stainless steel AISI 316



Specifications

PTV guidelines	36+ Low Slip Potential
Dry PTV average	66
Wet PTV average	50
Slip resistance	R13 = slope >35° acc. to DIN 51130
Displacement space	V10 acc. to DIN 51130
Free area	20-25 %
Upward grip holes	dia. 9
Downward drainage holes	dia. 5 mm
C-C grid	25 x 25 mm

Suitable application areas


Straight staircases

Standard dimensions

Length (mm)	Width (mm)	Height (mm)	Mat. thickness (mm)	Finish	Availability	Item number
600	150	33	2	Mill finish	On request	F120024200
600	150	33	2	Pickled	On request	F120024240
500	200	45	2	Pickled	Stock item	F120084240
600	200	45	2	Mill finish	Stock item	F120094200
600	200	45	2	Pickled	Stock item	F120094240
700	200	45	2	Mill finish	Stock item	F120104200
700	200	45	2	Pickled	Stock item	F120104240
800	200	45	2	Mill finish	Stock item	F120114200
800	200	45	2	Pickled	Stock item	F120114240

End piece dimensions

Width (Pw) (mm)	Total height (Ht) (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	K (mm)
150		35	11	11	11	14	78
200		45	15	13	13	17	102
225		45	15	13	13	17	127
250		50	15	13	13	17	142
275		62	15	13	13	17	143
300		50	15	13	13	17	192

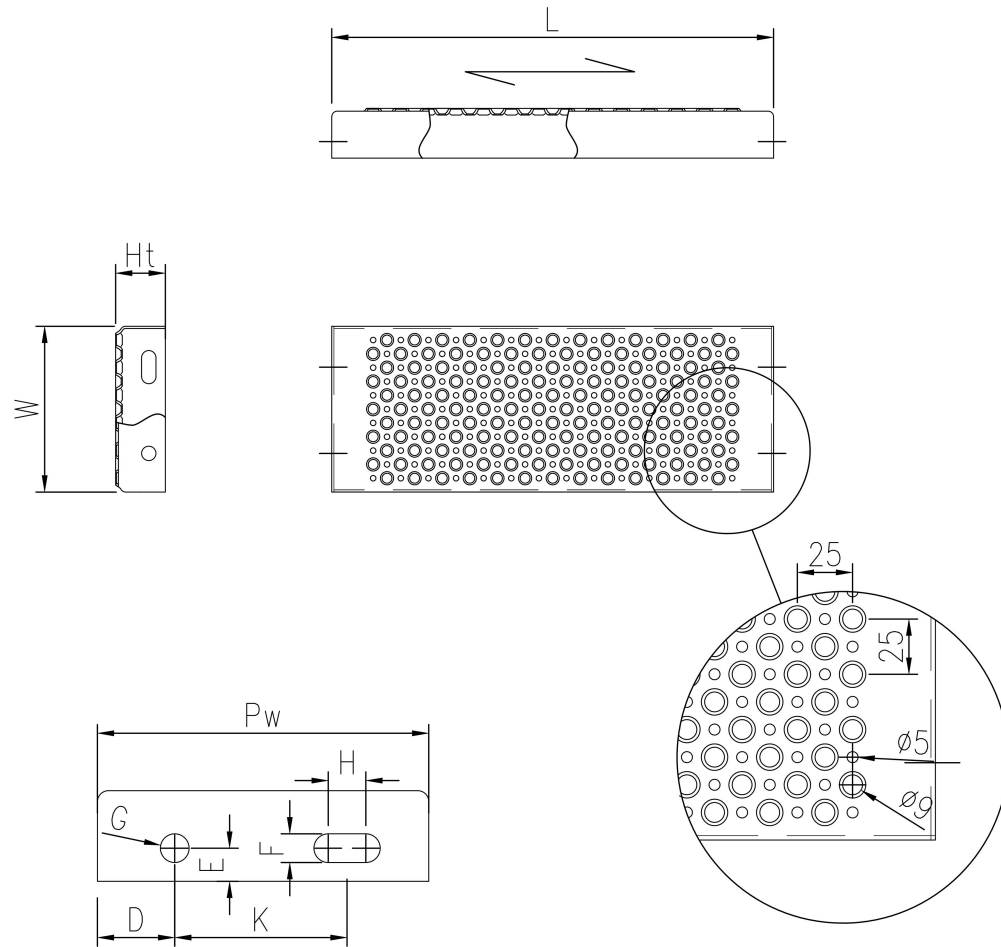

PcP Product name
 OPTIMO Tread O2