




# Plank grating Plain

## Steel 240 YP

Punched hole mesh gratings CUBE™ has a high strength-to-weight ratio which means that strength is maintained while weight is reduced. The greater the span, the lower is the weight – in relation to pressure-locked mesh gratings. The CUBE™ grating can be produced in three design variants depending on how much slip resistance is needed. CUBE™ mesh gratings are recommended in most constructions and industries where high air- or liquid flow are required.

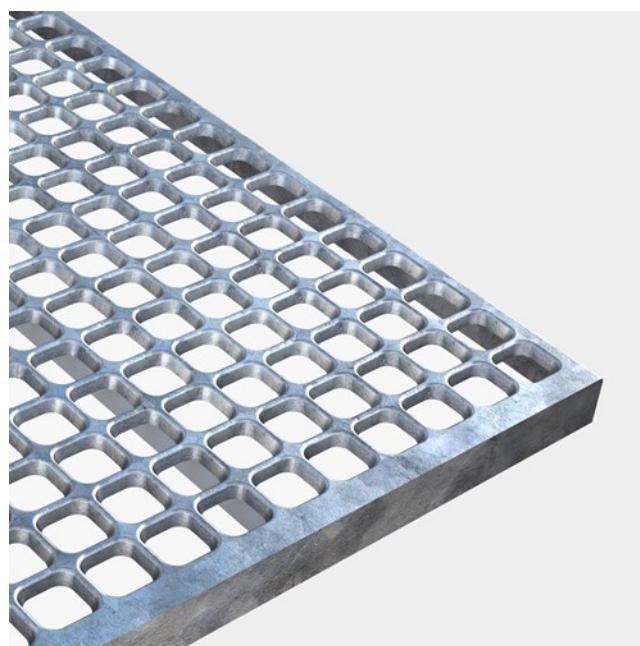

### Specifications

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| Free area                            | 50-56 %                                 |
| Downward drainage holes              | 34x34 mm                                |
| C-C grid                             | 43,5 x 43,5 mm                          |
| Ball proof                           | 35 mm in accordance with EN ISO 14122-2 |
| Fire resistance Critical temperature | 550 °C                                  |

**Accessories**

Fixing clip, upper part   Ma44/CUBE

Fixing clip, lower part

**Related products**

Fixing clip, upper part   Ma44/CUBE

Fixing clip, lower part

Plank grating   Oyster

Plank grating   Dimple

Plank grating   Round

Plank   Plain

**Other materials available**

Stainless steel