




Plank grating Plain

Steel 240 YP

Punched hole mesh gratings CUBE™ has a high strength-to-weight ratio which means that strength is maintained while weight is reduced. The greater the span, the lower is the weight – in relation to pressure-locked mesh gratings. The CUBE™ grating can be produced in three design variants depending on how much slip resistance is needed. CUBE™ mesh gratings are recommended in most constructions and industries where high air- or liquid flow are required.

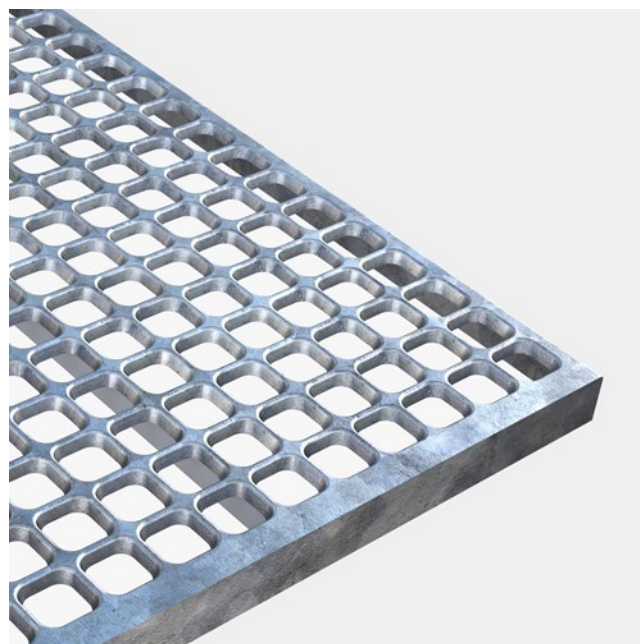

Specifications

Free area	50-56 %
Downward drainage holes	34x34 mm
C-C grid	43,5 x 43,5 mm
Ball proof	35 mm in accordance with BS 4592
Fire resistance Critical temperature	550 °C

Accessories

Fixing Clip, Upper Part MA44/Cube
Fixing Clip, Lower Part

Related products

Fixing Clip, Upper Part MA44/Cube
Fixing Clip, Lower Part
Plank grating Oyster
Plank grating Dimple
Plank grating Round

Other materials available

Stainless steel
